



US011015884B2

(12) **United States Patent**
Drake et al.

(10) **Patent No.:** **US 11,015,884 B2**
(45) **Date of Patent:** **May 25, 2021**

(54) **CHASSIS OF SEMIAUTOMATIC RIFLES**

USPC 42/72, 71.01
See application file for complete search history.

(71) Applicant: **Drake Associates, Inc.**, Vero Beach, FL
(US)

(72) Inventors: **Christopher Drake**, Vero Beach, FL
(US); **Leslie C. Blahut**, Vero Beach, FL
(US)

(73) Assignee: **Drake Associates, Inc.**, Vero Beach, FL
(US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/844,650**

(22) Filed: **Apr. 9, 2020**

(65) **Prior Publication Data**

US 2020/0284535 A1 Sep. 10, 2020

Related U.S. Application Data

(63) Continuation-in-part of application No. 16/272,836,
filed on Feb. 11, 2019, now Pat. No. 10,739,107,
which is a continuation-in-part of application No.
15/873,468, filed on Jan. 17, 2018, now Pat. No.
10,203,178.

(60) Provisional application No. 62/739,673, filed on Oct.
1, 2018, provisional application No. 62/446,898, filed
on Jan. 17, 2017.

(51) **Int. Cl.**

F41A 3/66 (2006.01)
F41A 21/48 (2006.01)
F41C 23/16 (2006.01)

(52) **U.S. Cl.**

CPC **F41A 3/66** (2013.01); **F41A 21/48**
(2013.01); **F41C 23/16** (2013.01)

(58) **Field of Classification Search**

CPC F41A 3/66; F41C 23/16

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,339,331 A	1/1944	Grigg	
3,011,283 A	12/1961	Lunn	
5,711,102 A	1/1998	Plaster et al.	
5,873,189 A	2/1999	Menke	
6,839,998 B1	1/2005	Armstrong	
7,802,392 B2 *	9/2010	Peterson	F41A 11/02 42/75.03
7,926,217 B2	4/2011	McCann	
8,234,808 B2	8/2012	Lewis et al.	
9,429,375 B2 *	8/2016	DeSomma	F41A 3/66
9,534,859 B2	1/2017	Battaglia et al.	
9,568,261 B1 *	2/2017	Hall	F41A 3/66

(Continued)

OTHER PUBLICATIONS

<https://geissele.com/super-modular-rail-mk8-m-lokr.html>; retrieved
Feb. 12, 2020.

(Continued)


Primary Examiner — Reginald S Tillman, Jr.

(74) *Attorney, Agent, or Firm* — Carter, DeLuca & Farrell
LLP

(57) **ABSTRACT**

A firearm includes a lower receiver defining a trigger well
configured to receive an action, a lower forend extending
distally from and monolithically formed with the lower
receiver, and an upper forend detachably coupled to the
lower forend. The lower forend and the upper forend
together define a channel therethrough configured for receipt
of a barrel of the firearm. The lower receiver is configured
to support the barrel with the length of the barrel free-
floating within the channel.

17 Claims, 28 Drawing Sheets

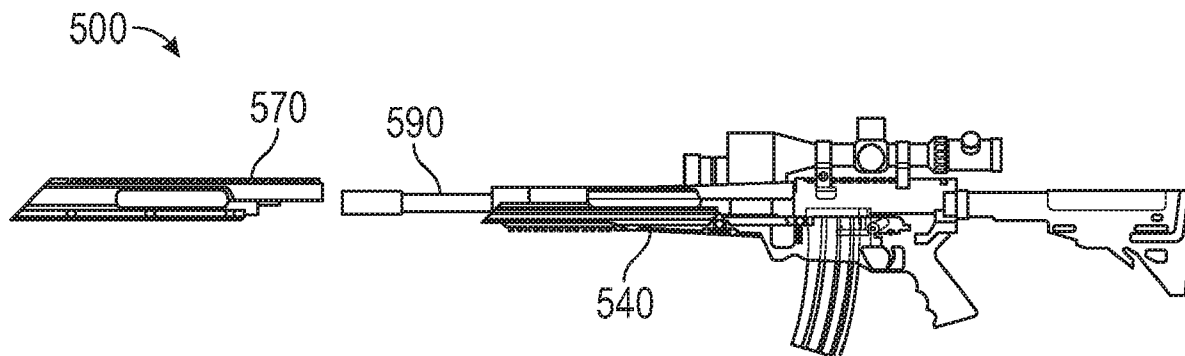

(56)

References Cited




U.S. PATENT DOCUMENTS

10,203,178	B2	2/2019	Drake	
10,222,149	B2 *	3/2019	Daley, Jr.	F41A 3/66
10,859,332	B2 *	12/2020	McMillan	F41A 3/66
2007/0180750	A1	8/2007	Al-Mulla	
2008/0244951	A1	10/2008	Picard	
2010/0162608	A1	7/2010	McCann	
2011/0283582	A1	11/2011	Hunter et al.	
2015/0192384	A1 *	7/2015	Ballard	F41A 9/70 42/49.01
2016/0178309	A1	6/2016	Drake	
2016/0313087	A1	10/2016	Leasure	
2017/0219310	A1	8/2017	Jones	

OTHER PUBLICATIONS

Canadian Office Action issued in corresponding Application No. 3,071,914 dated Jun. 19, 2020.

* cited by examiner

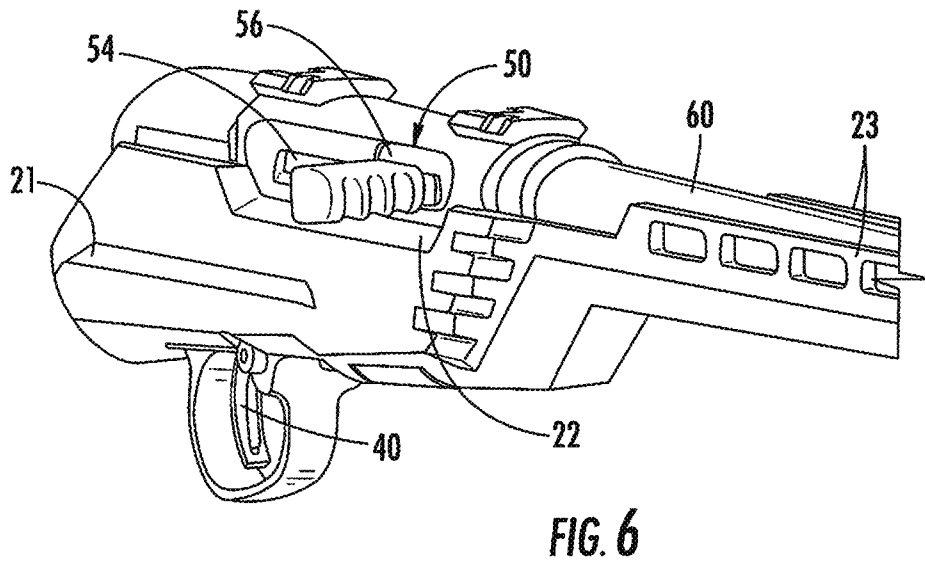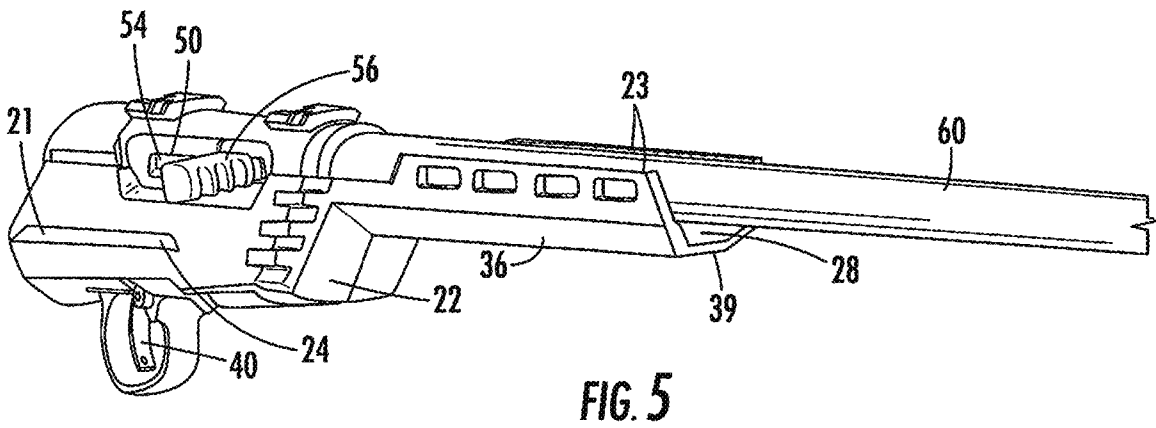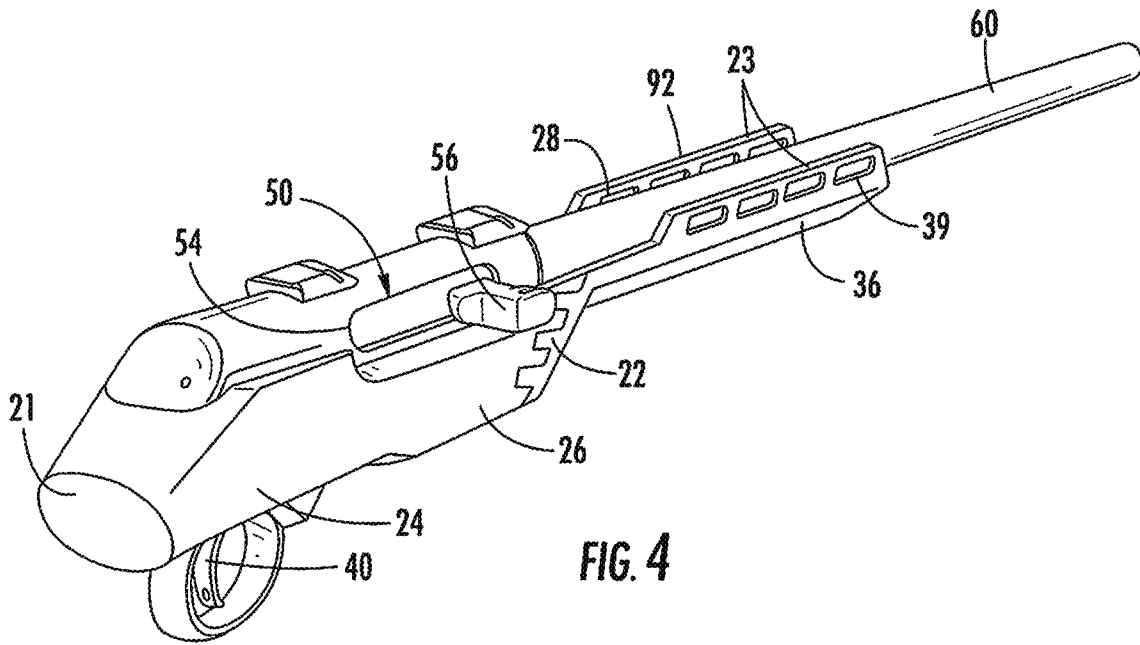

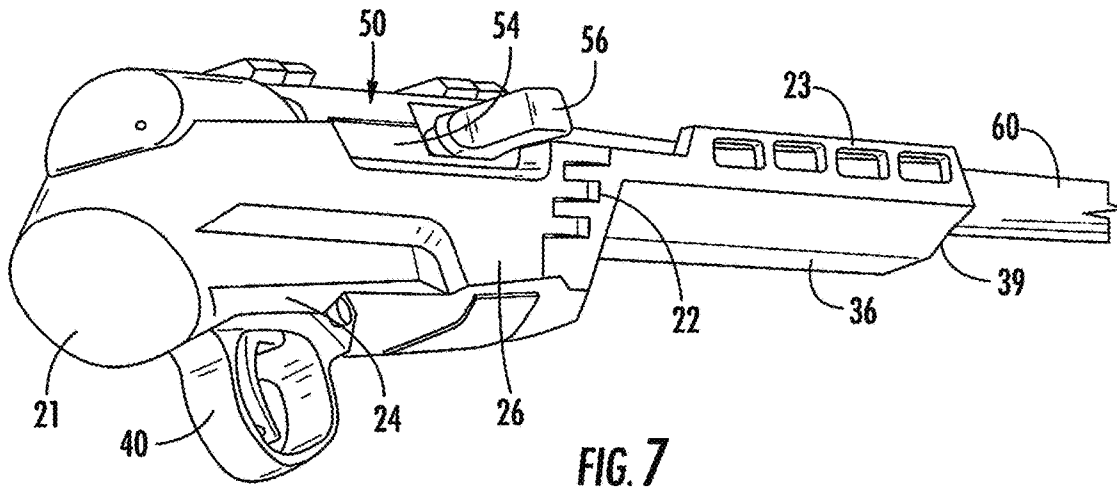


FIG. 7

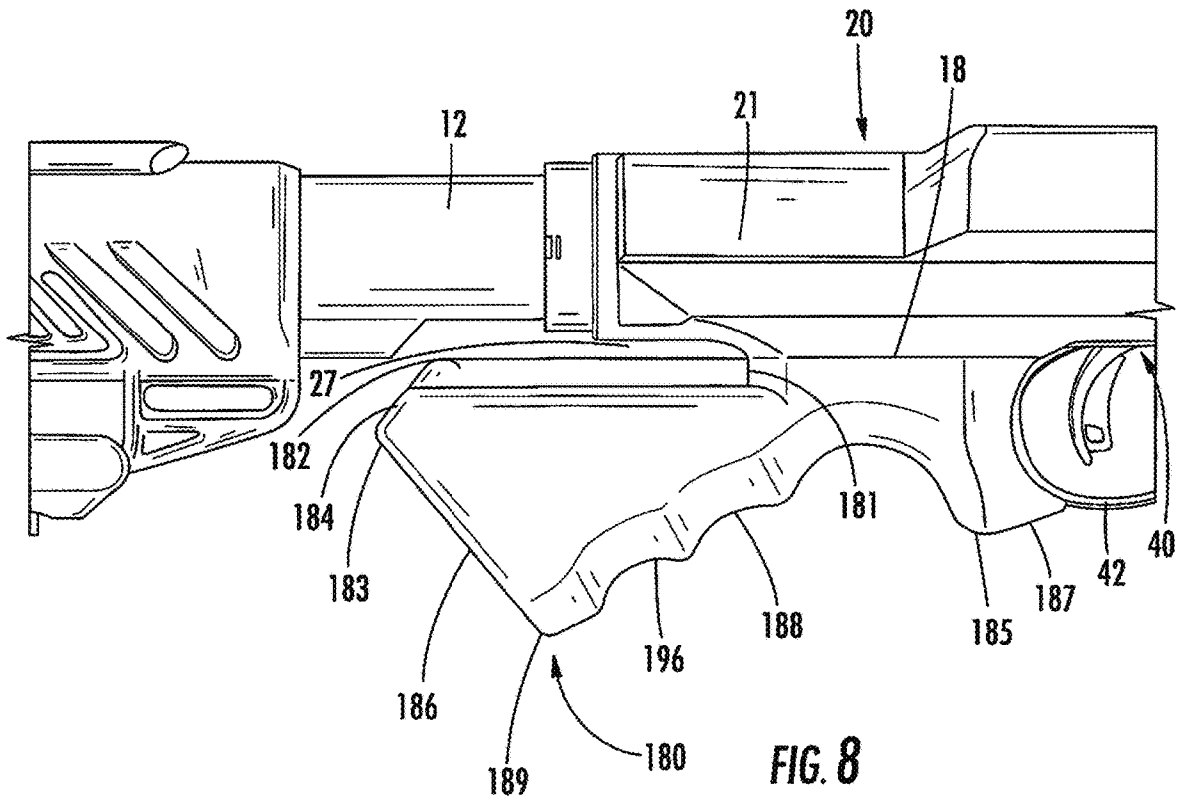
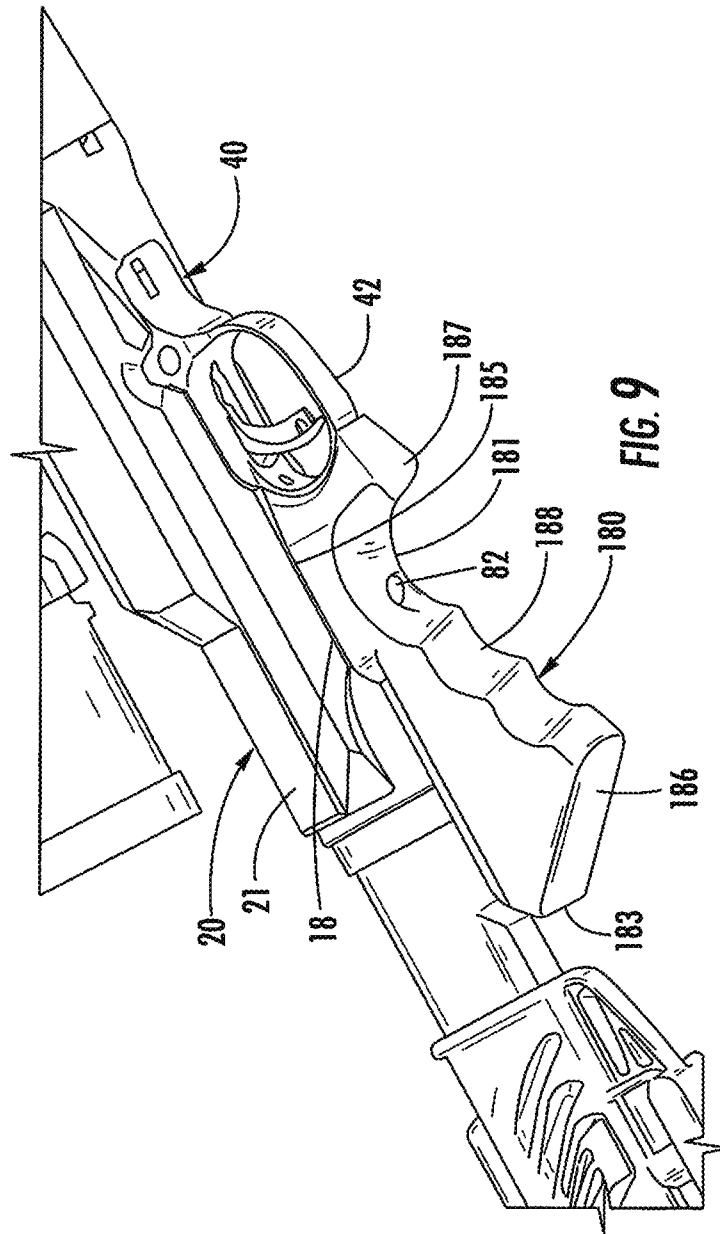


FIG. 8



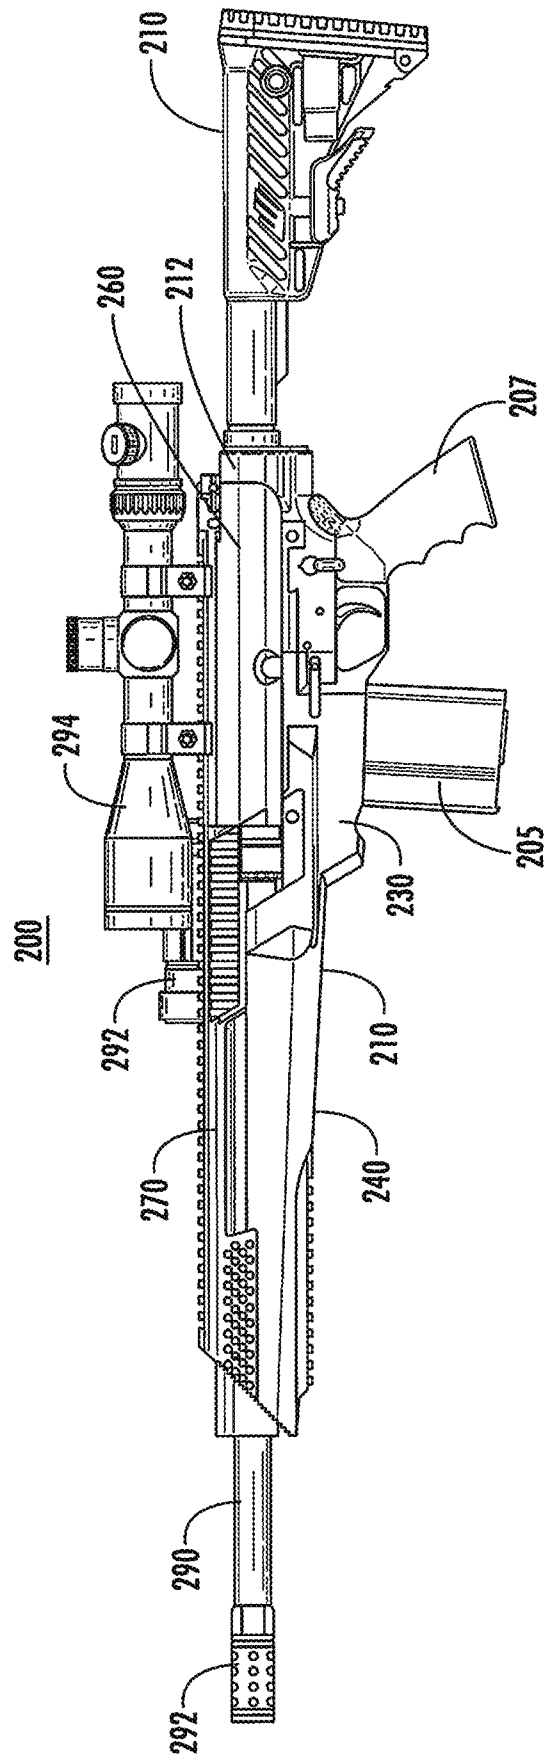


FIG. 10

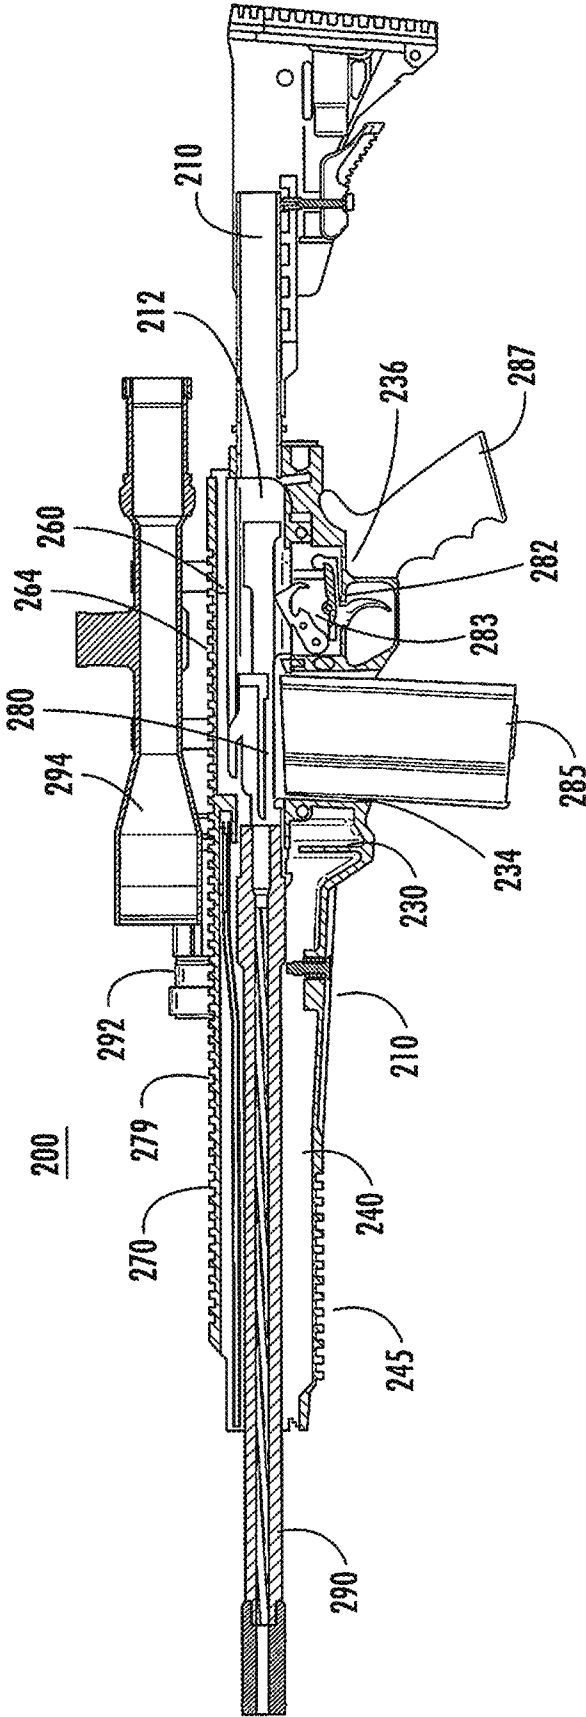
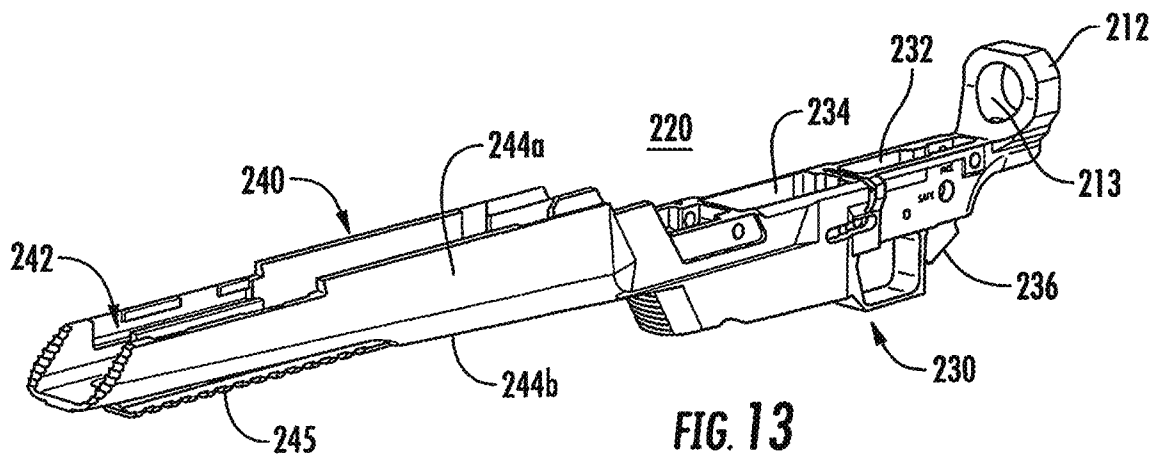
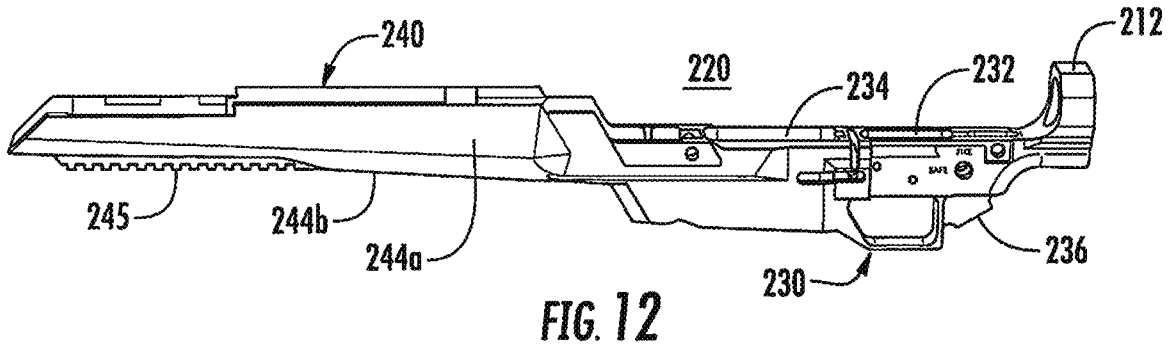
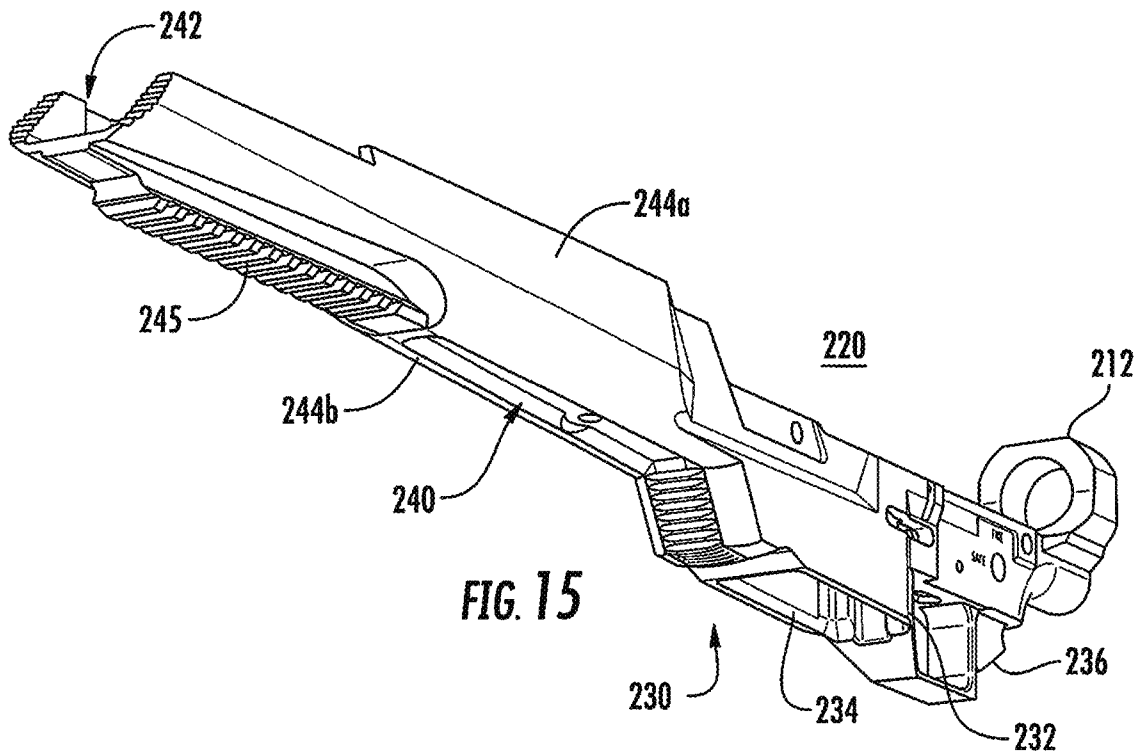
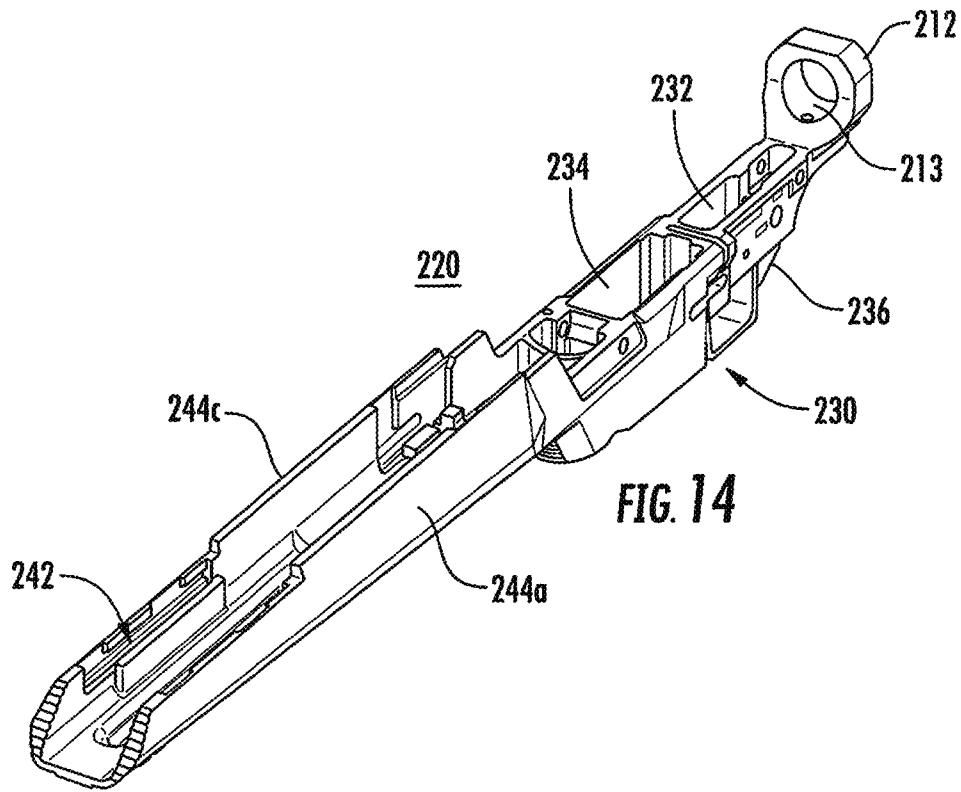


FIG. 11





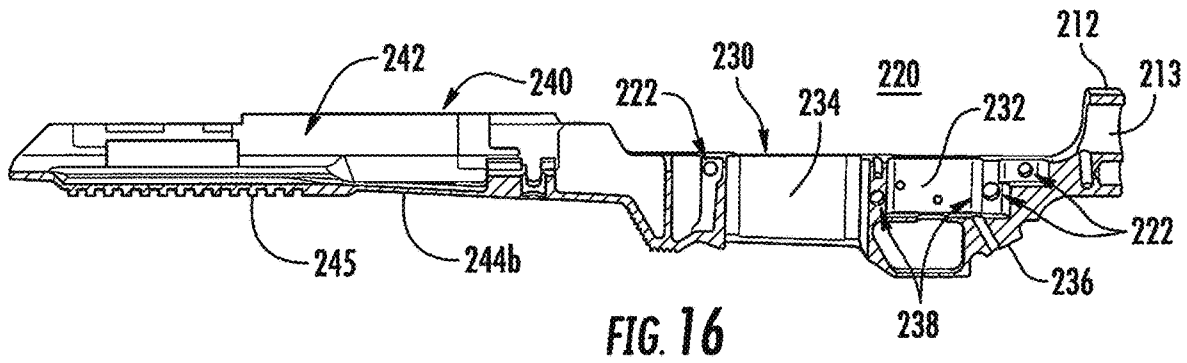


FIG. 16

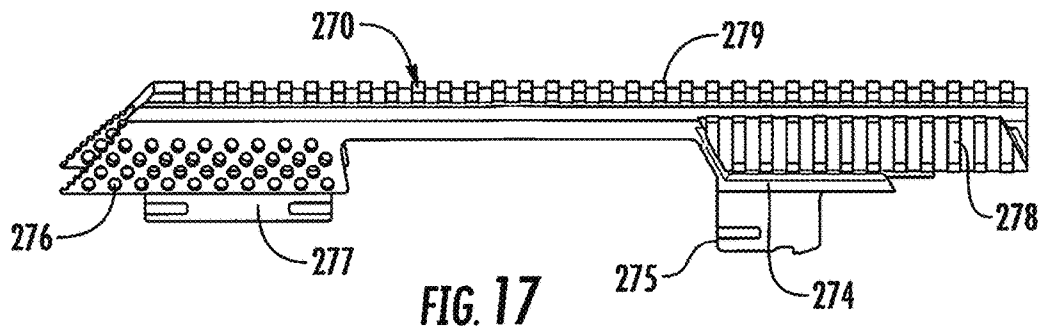


FIG. 17

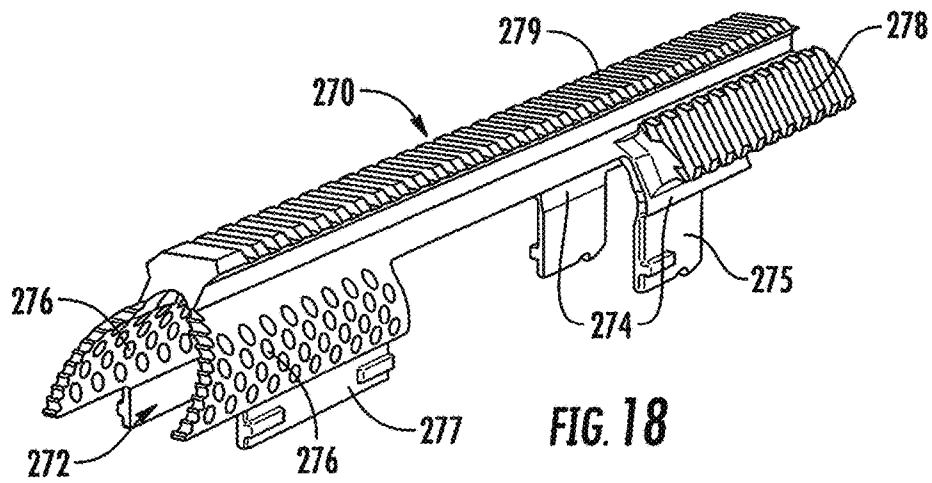


FIG. 18

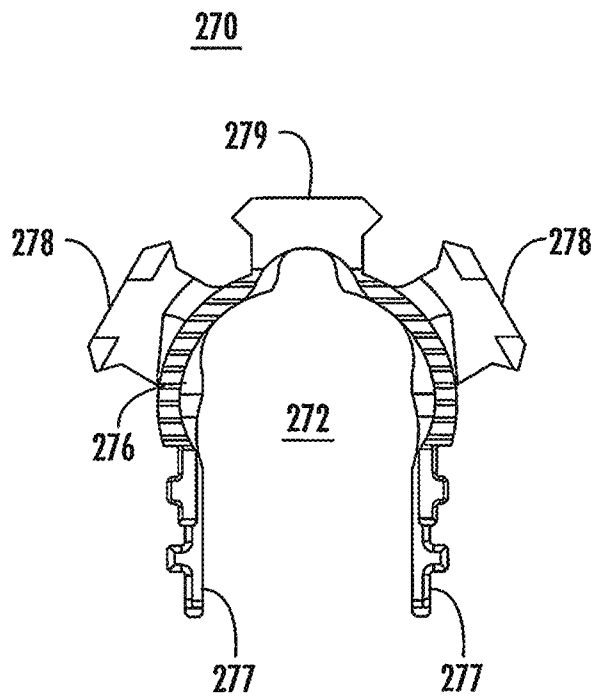


FIG. 19

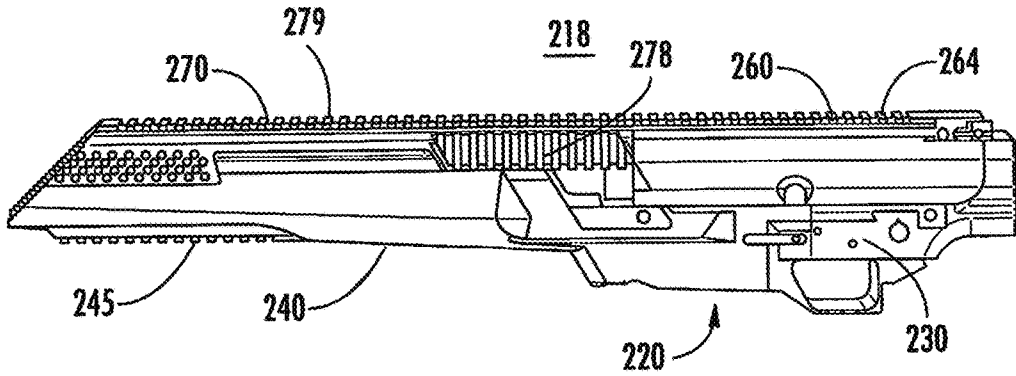


FIG. 20

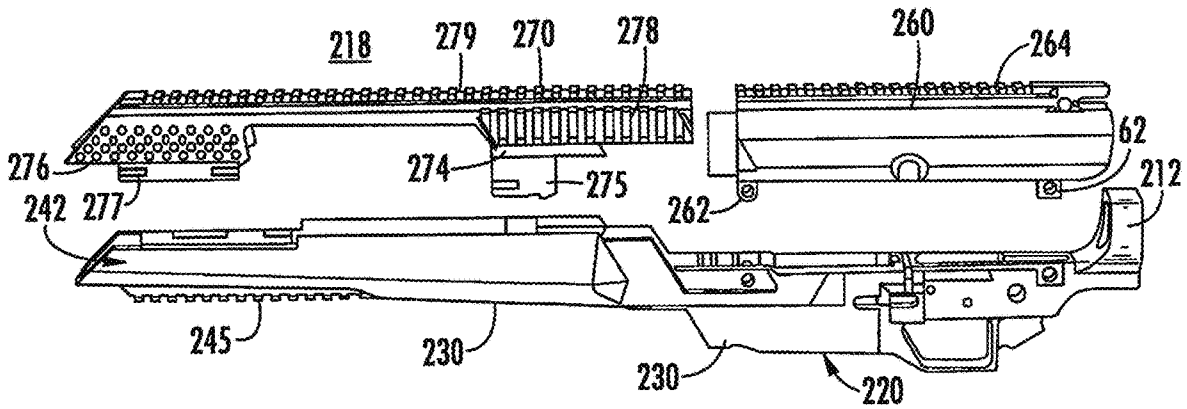


FIG. 21

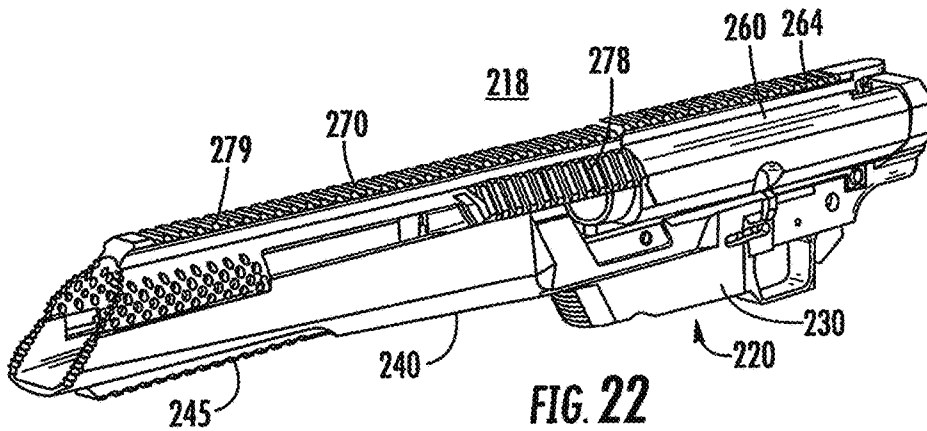


FIG. 22

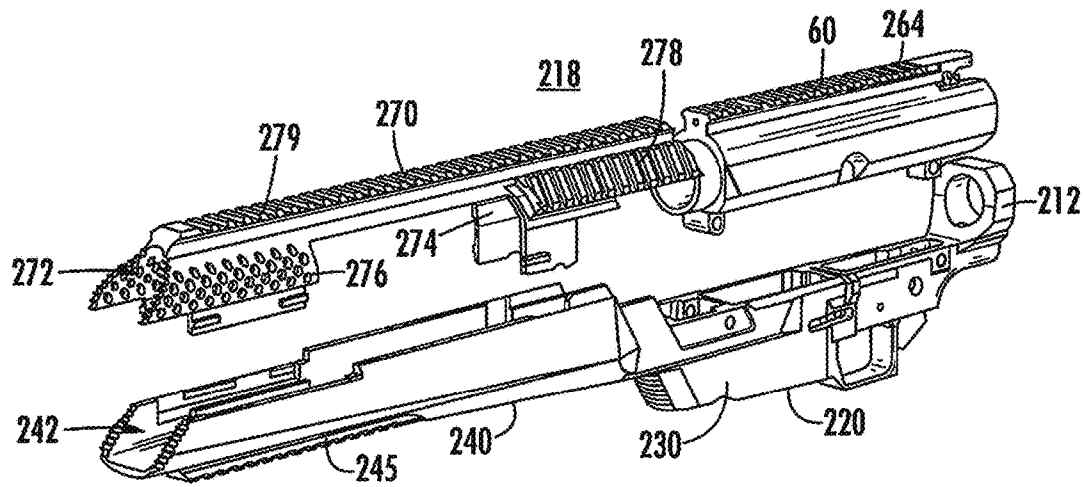


FIG. 23

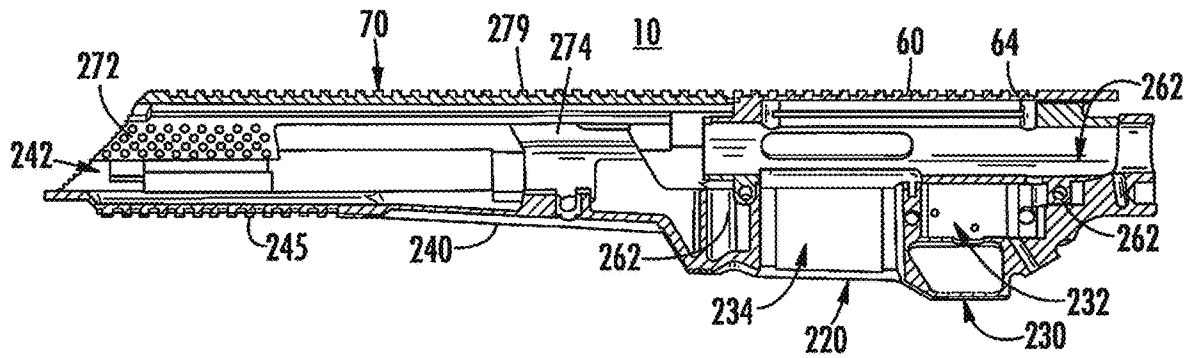


FIG. 24

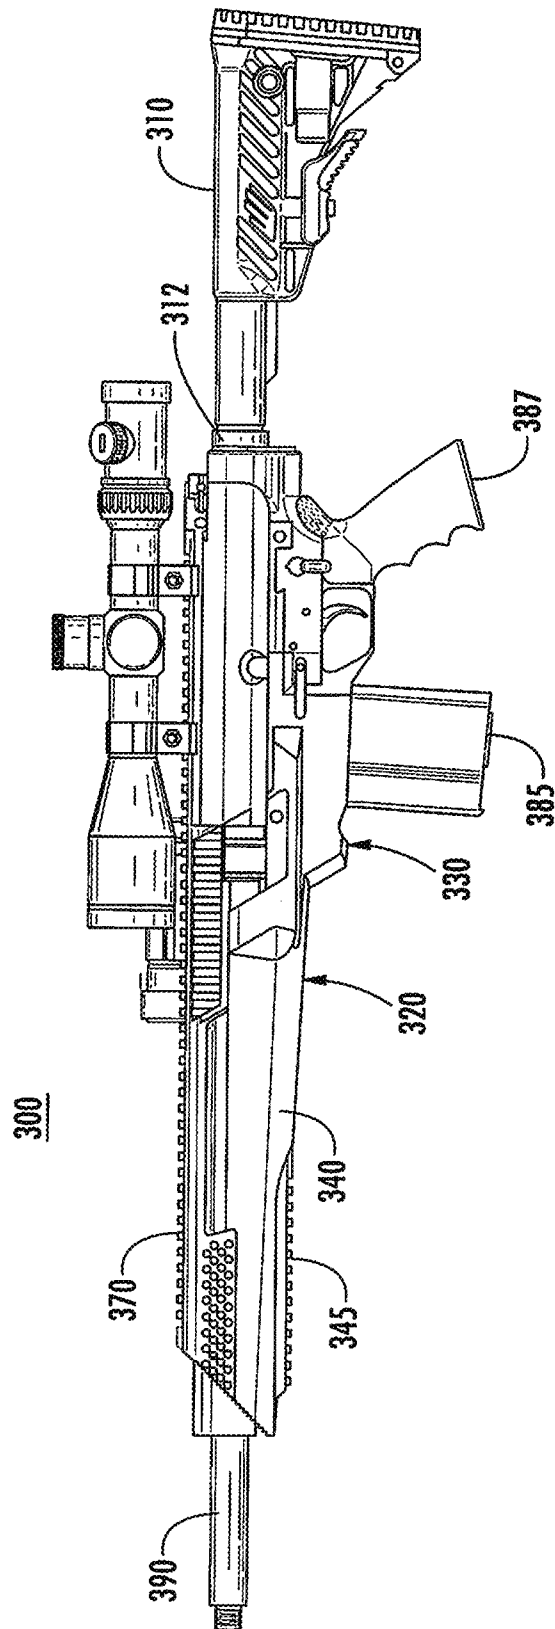


FIG. 25

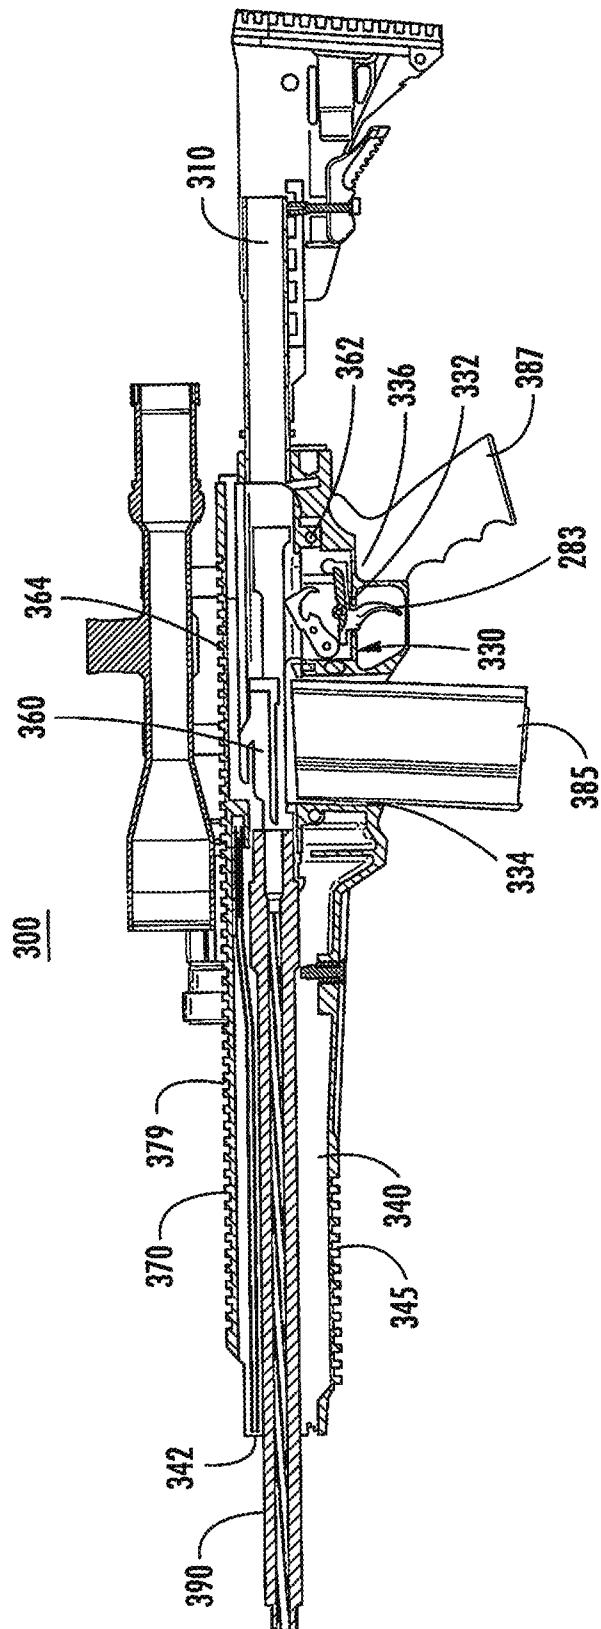


FIG. 26

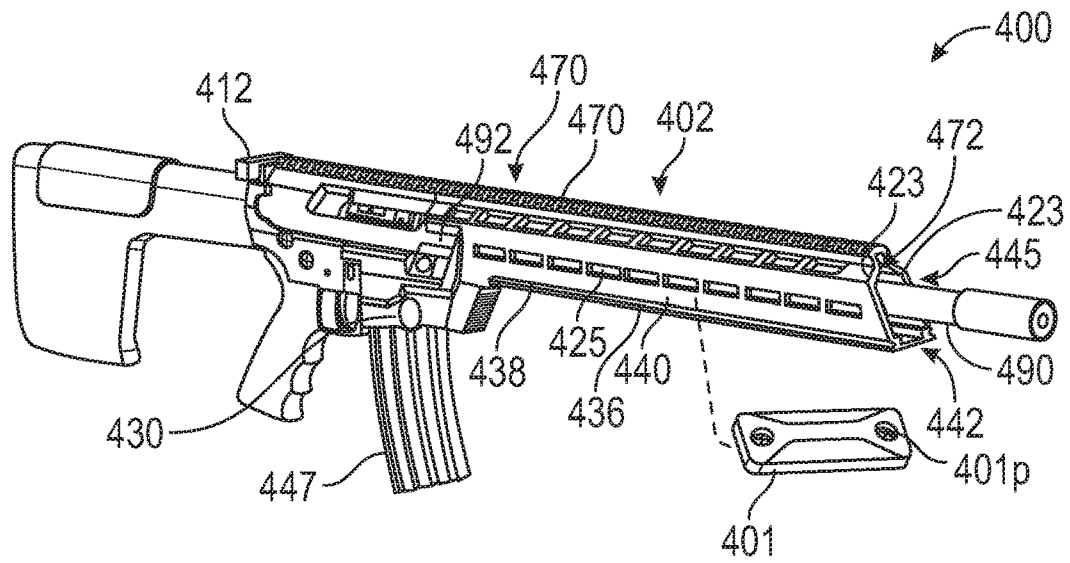


FIG. 27

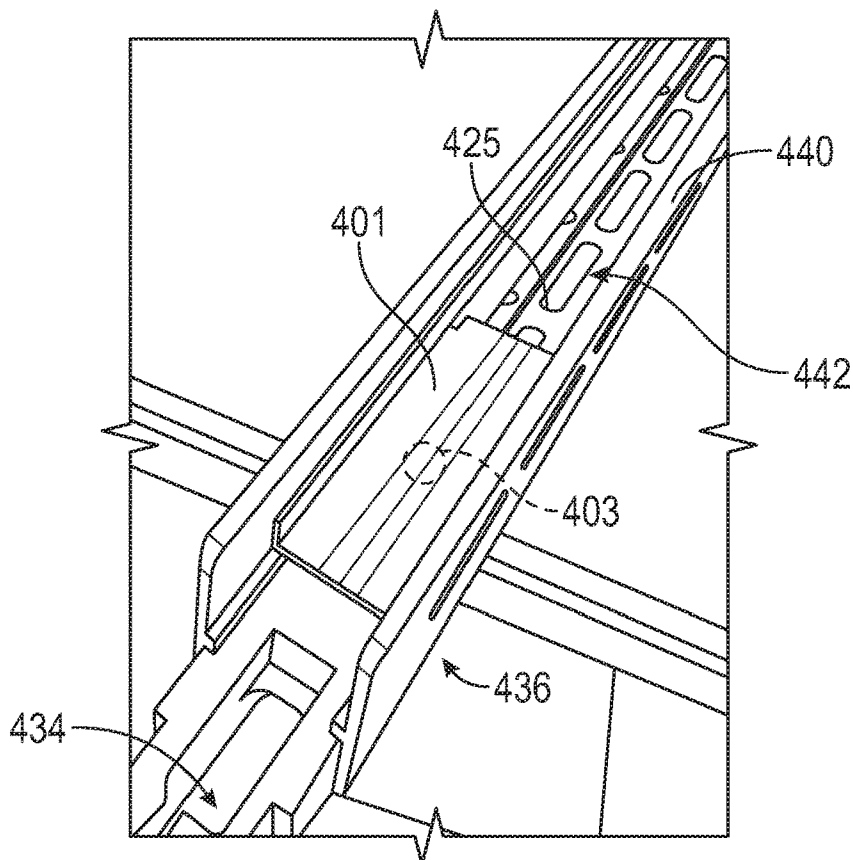


FIG. 28

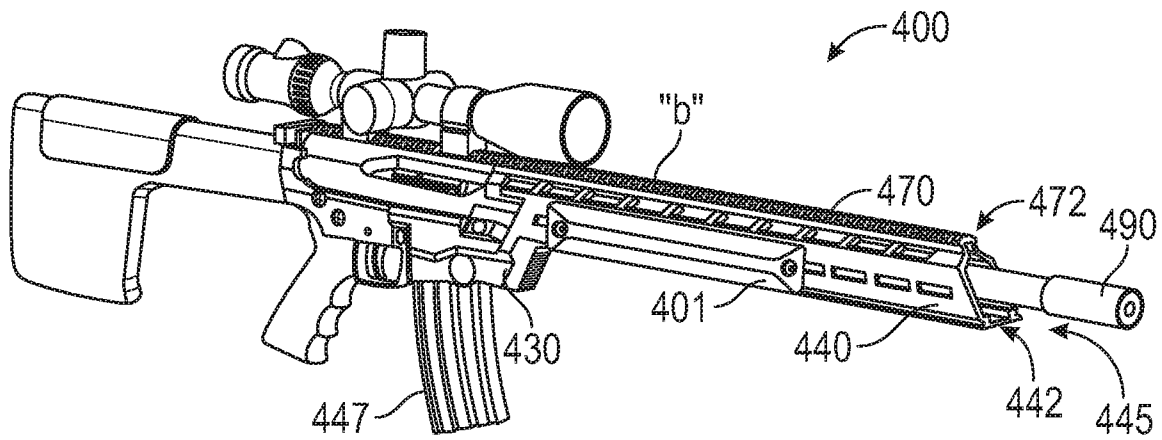


FIG. 29

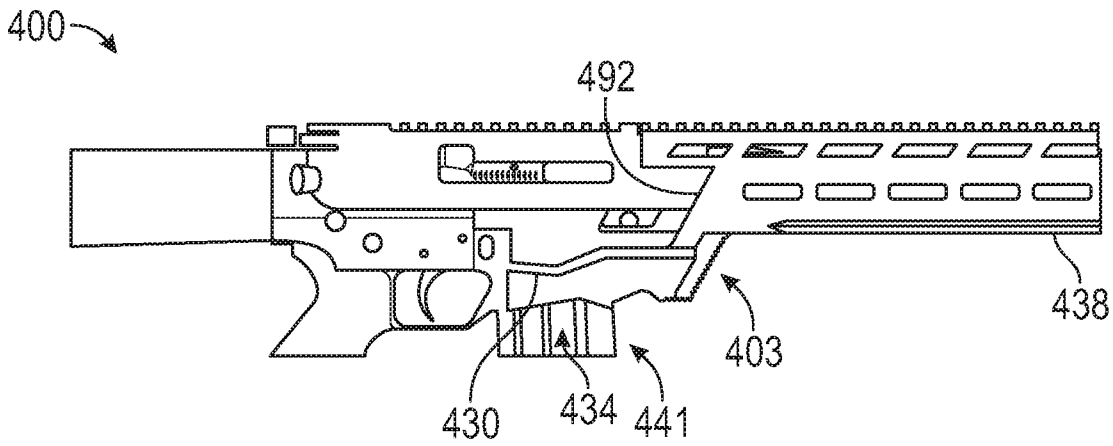


FIG. 30

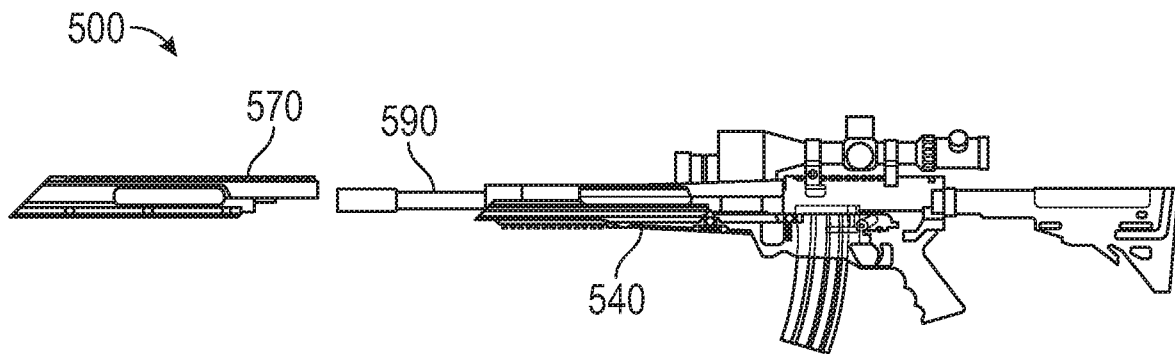


FIG. 31A

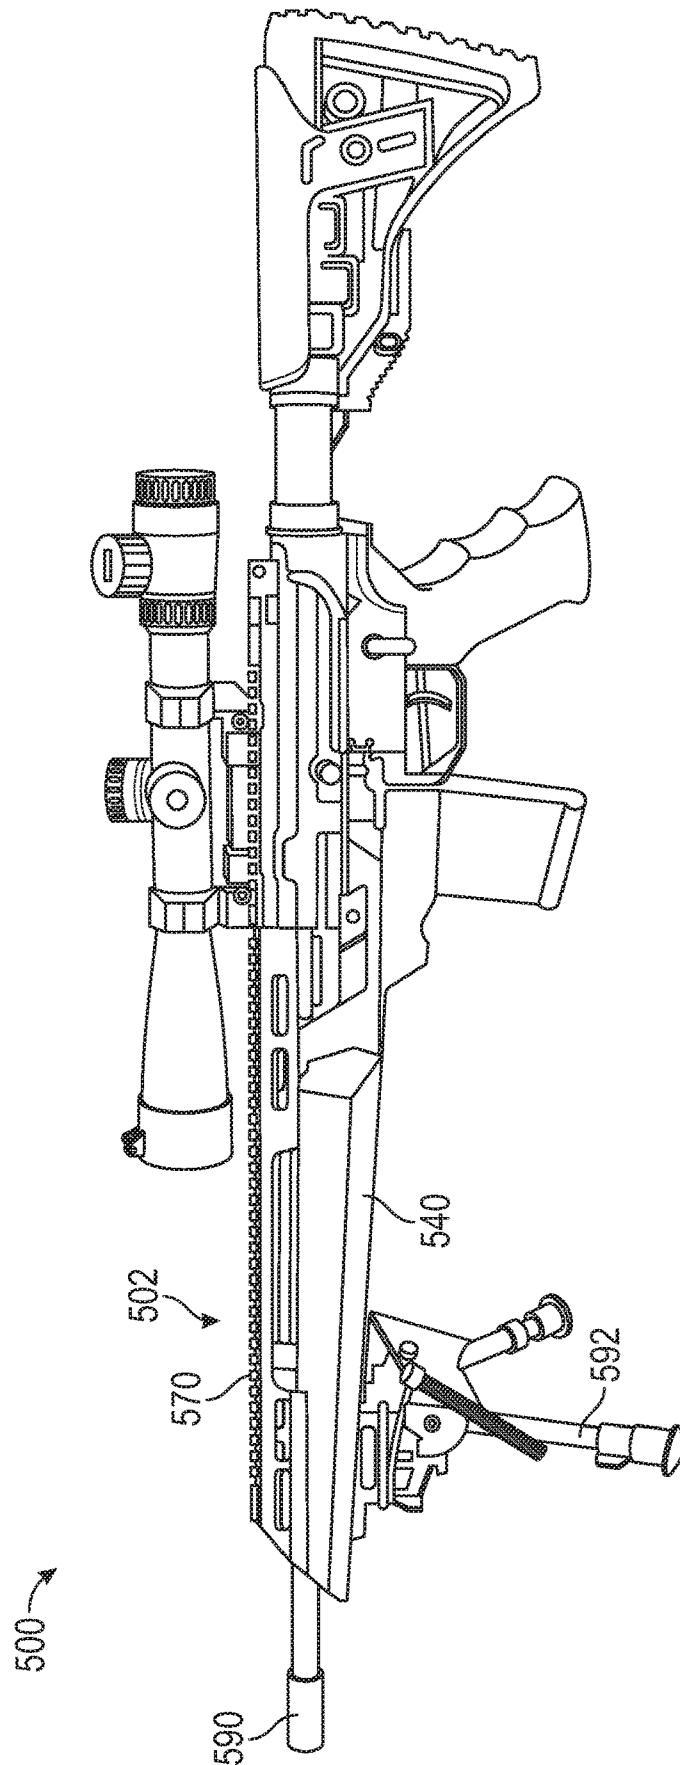


FIG. 31

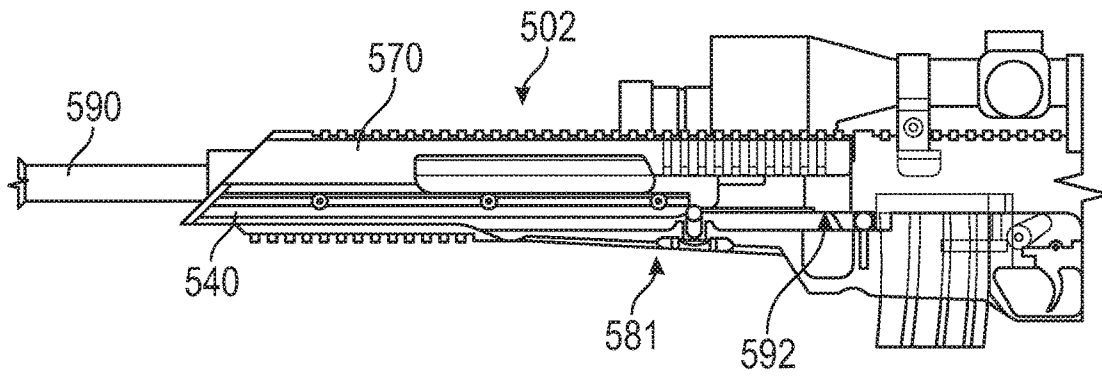


FIG. 32

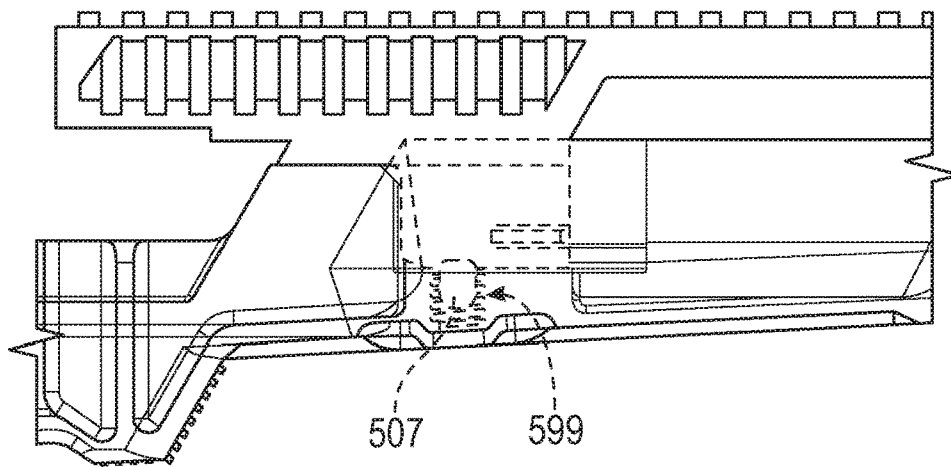


FIG. 33

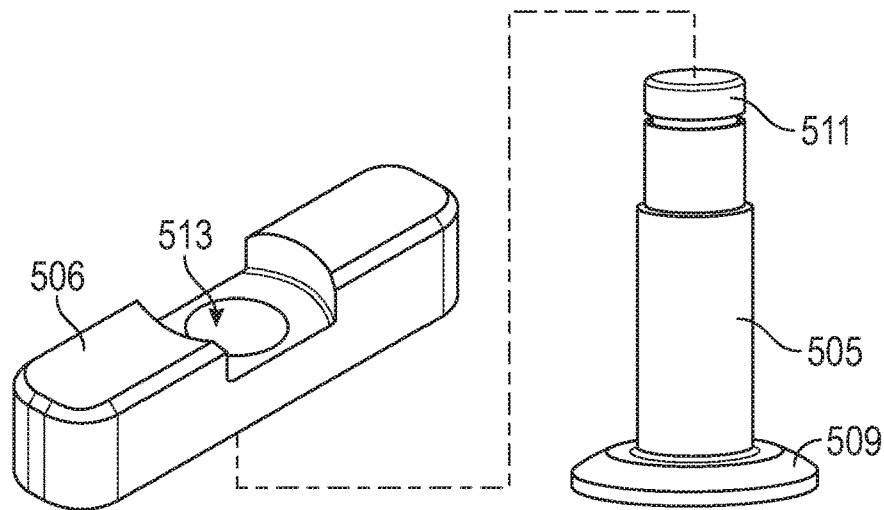


FIG. 34

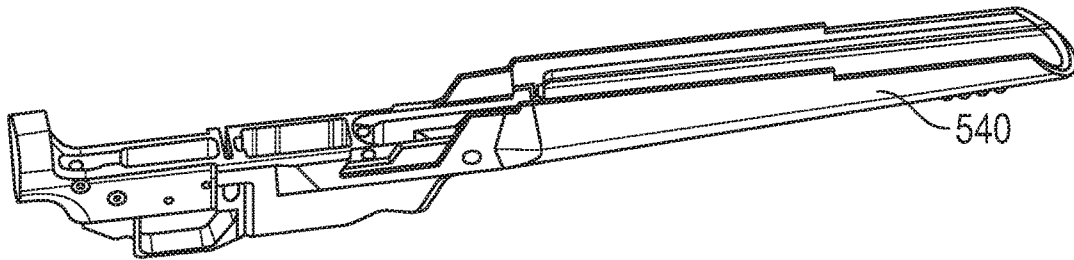


FIG. 35

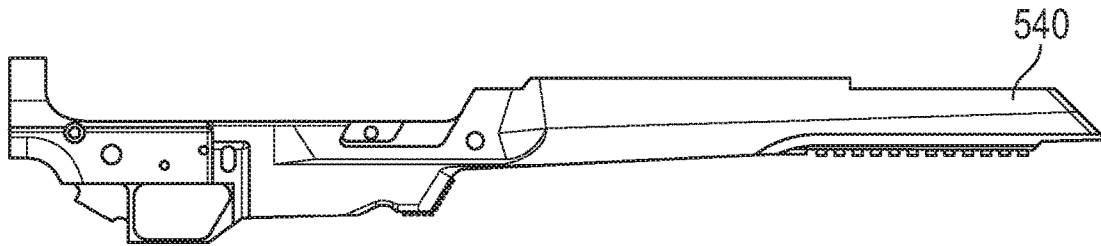


FIG. 36

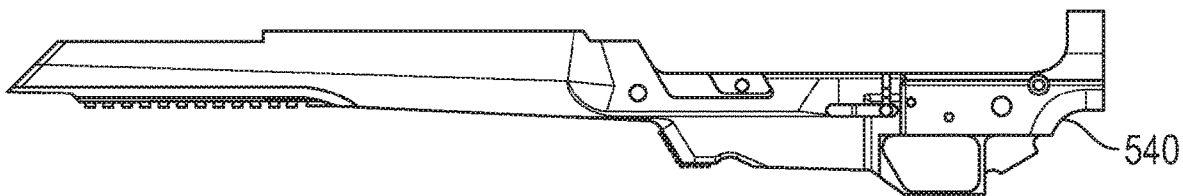


FIG. 37

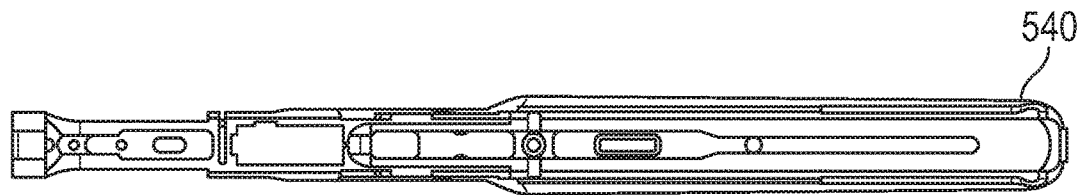


FIG. 38

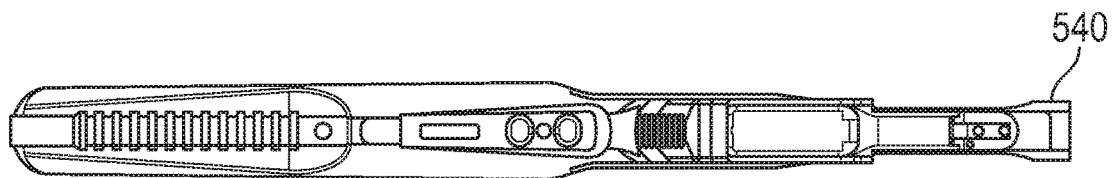


FIG. 39

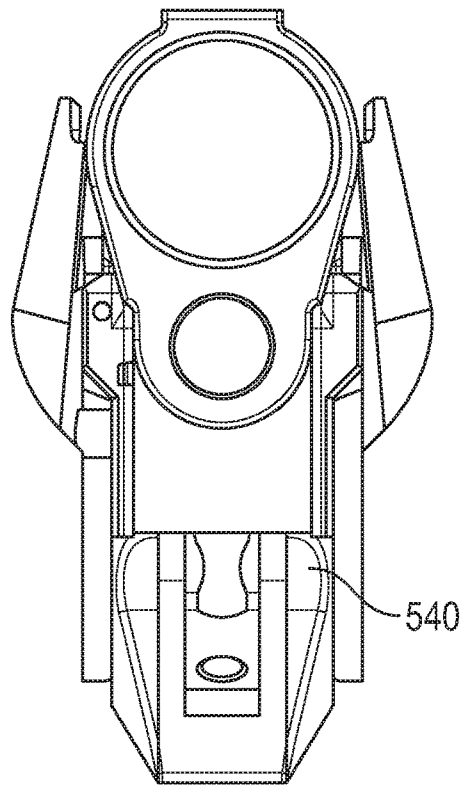


FIG. 40

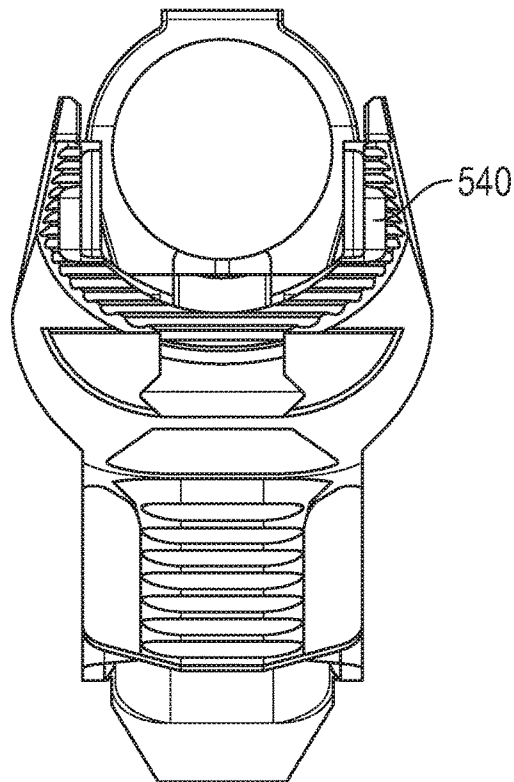


FIG. 41

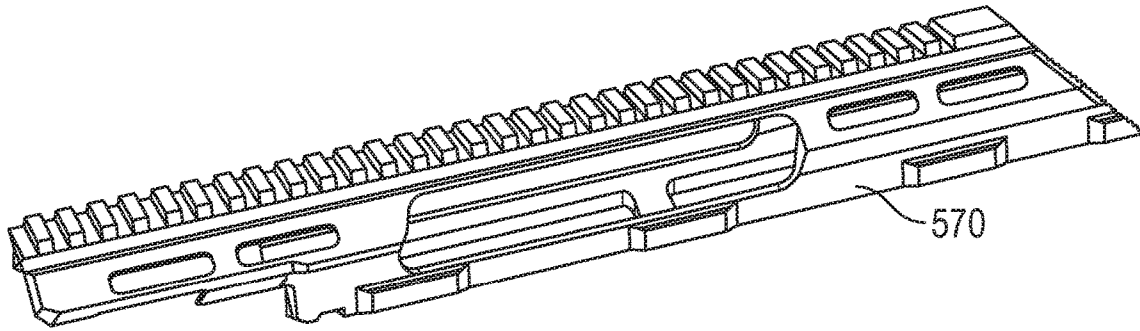


FIG. 42

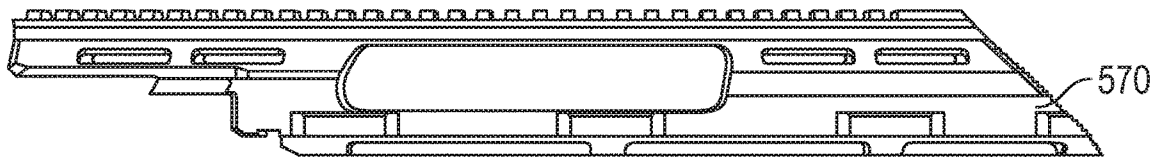


FIG. 43

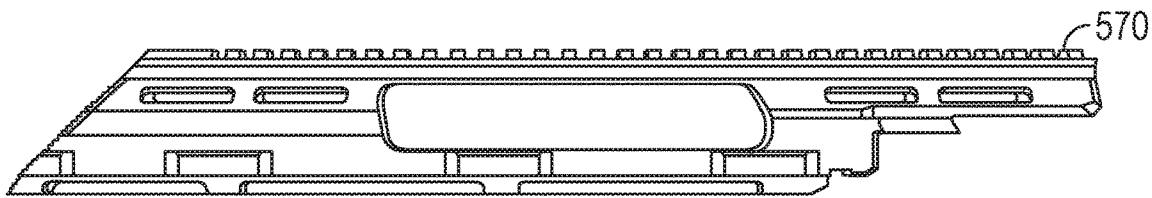


FIG. 44

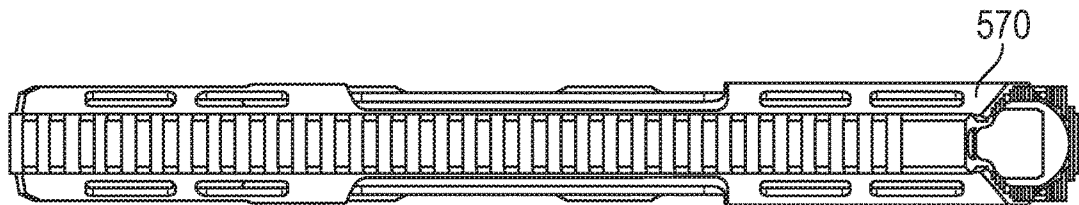


FIG. 45

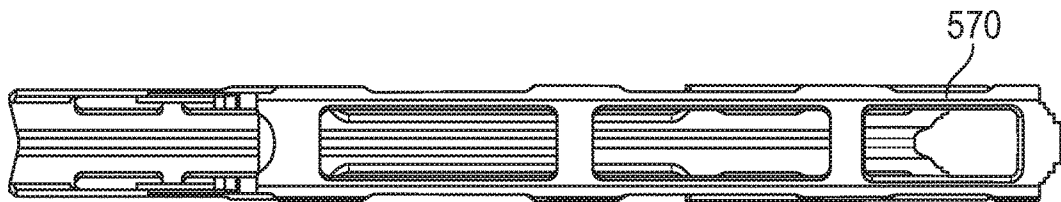


FIG. 46

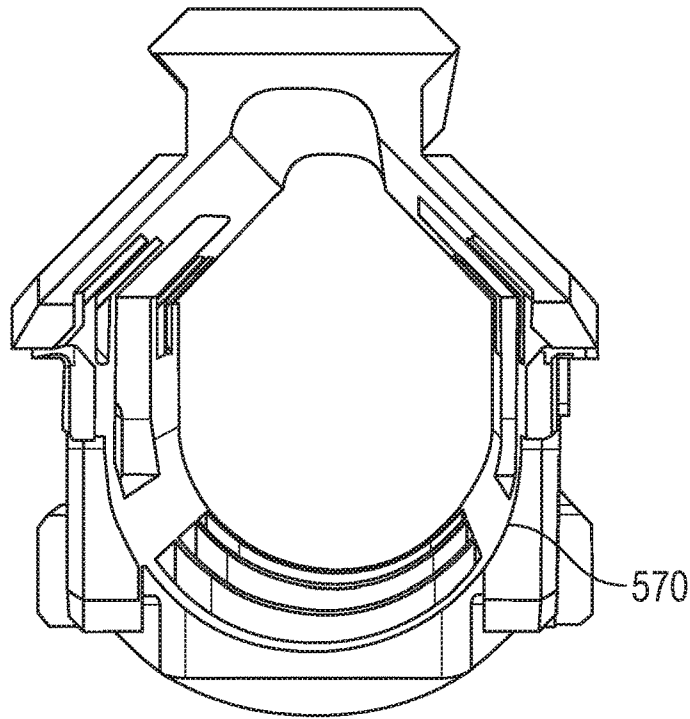


FIG. 47

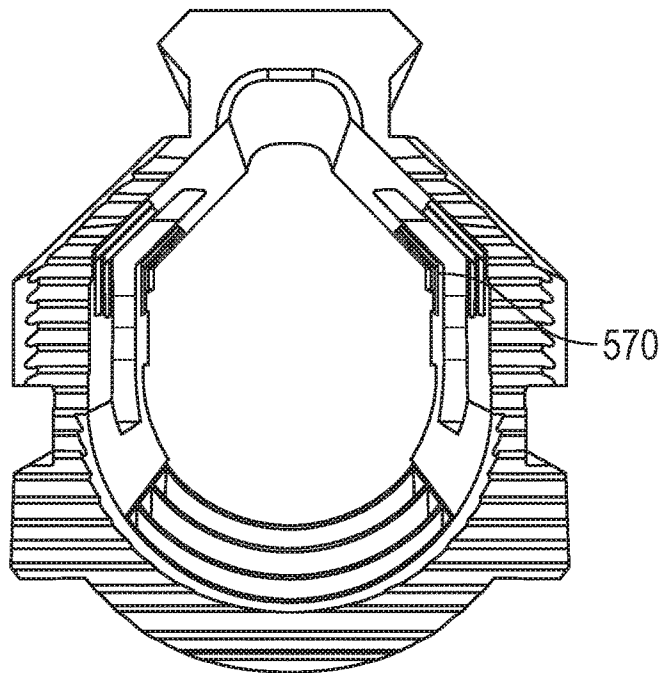


FIG. 48

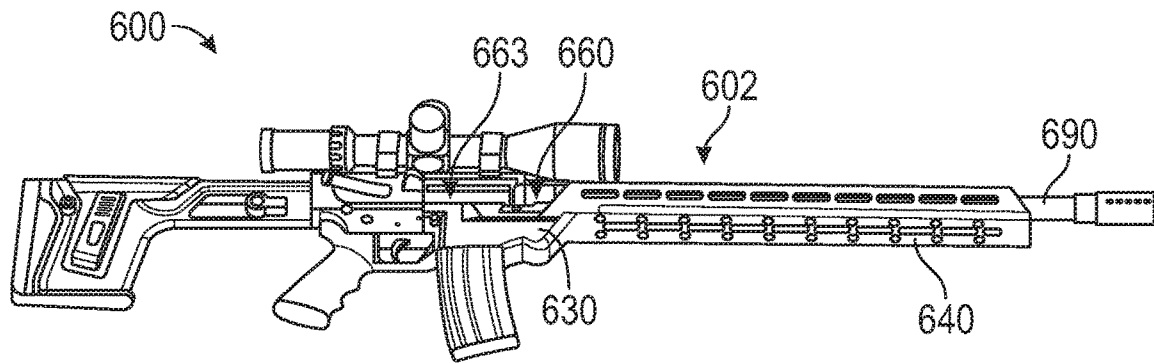


FIG. 49

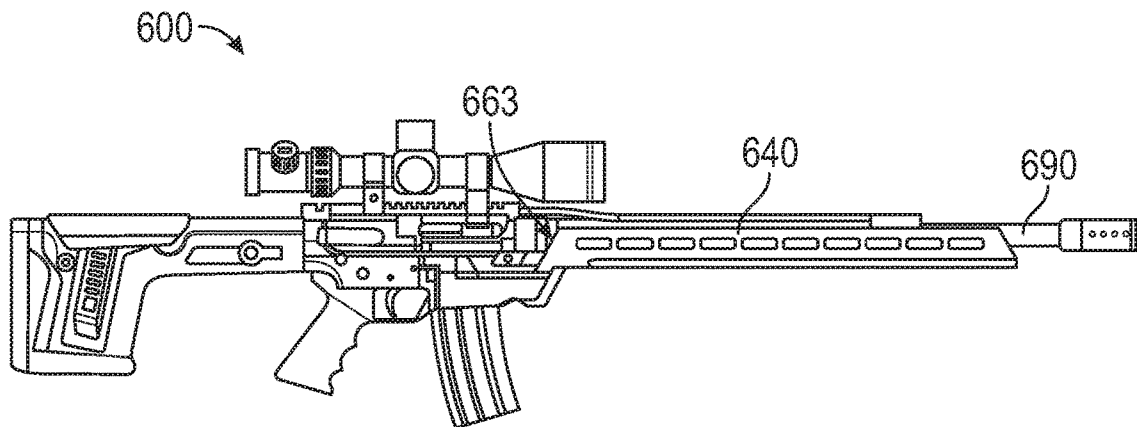


FIG. 50

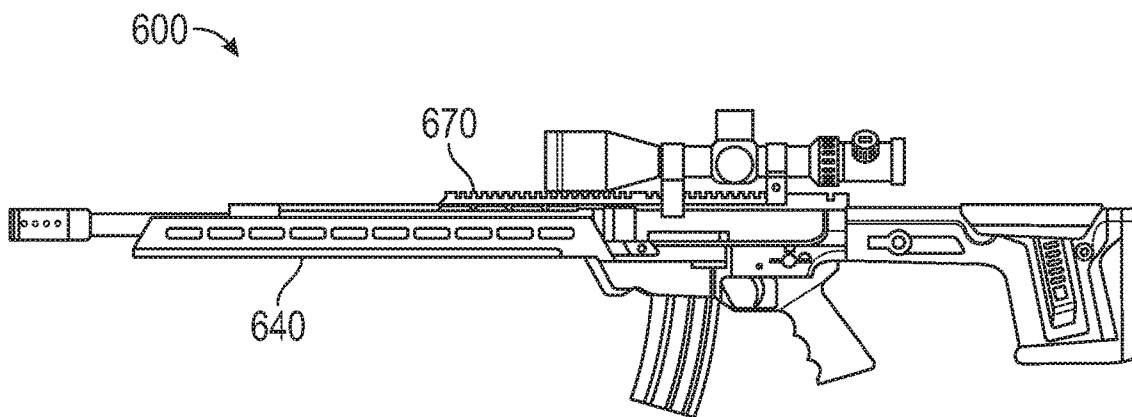
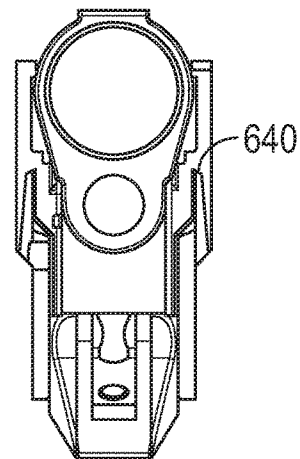
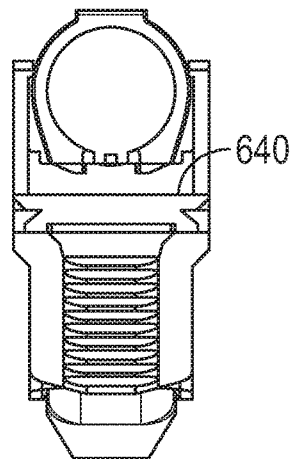
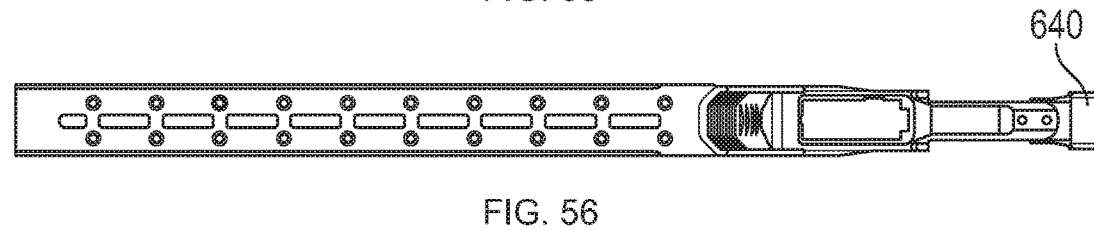
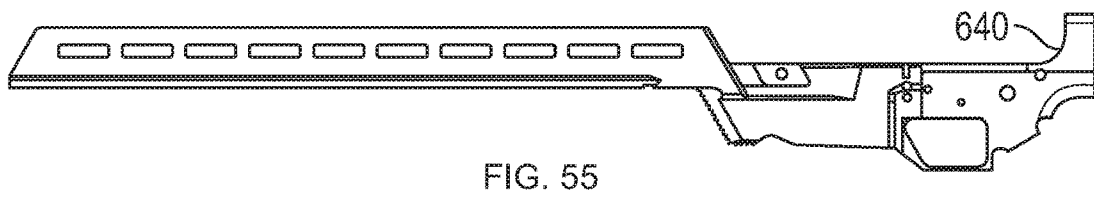
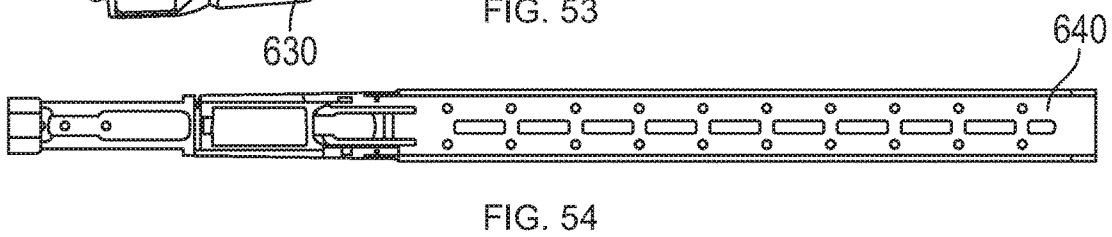
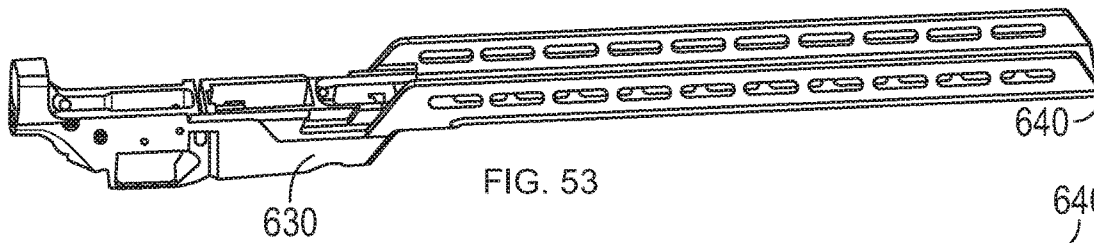
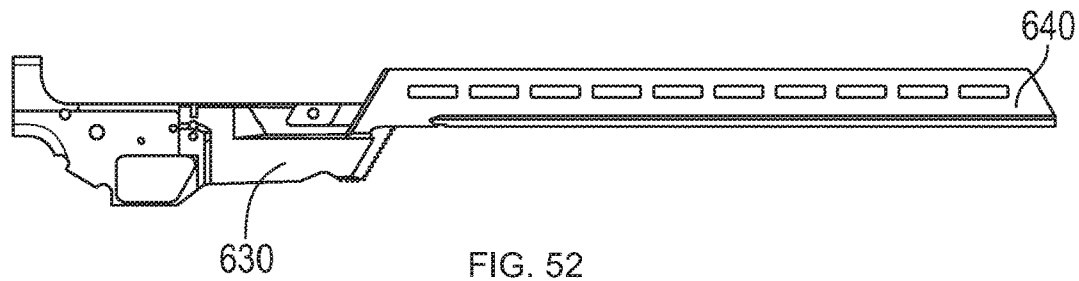


FIG. 51



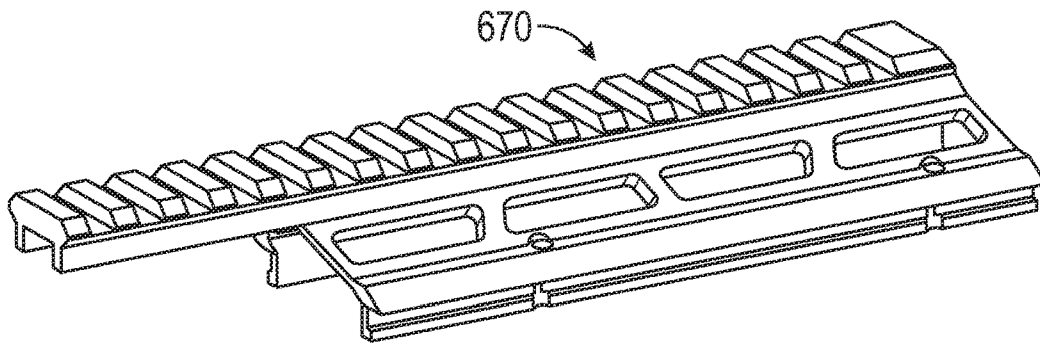


FIG. 59

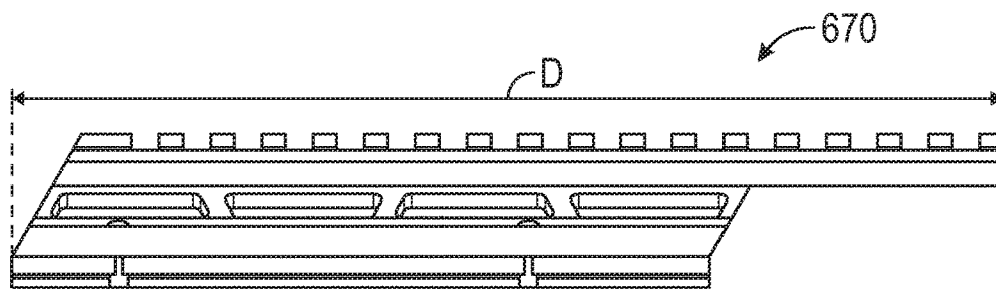


FIG. 60

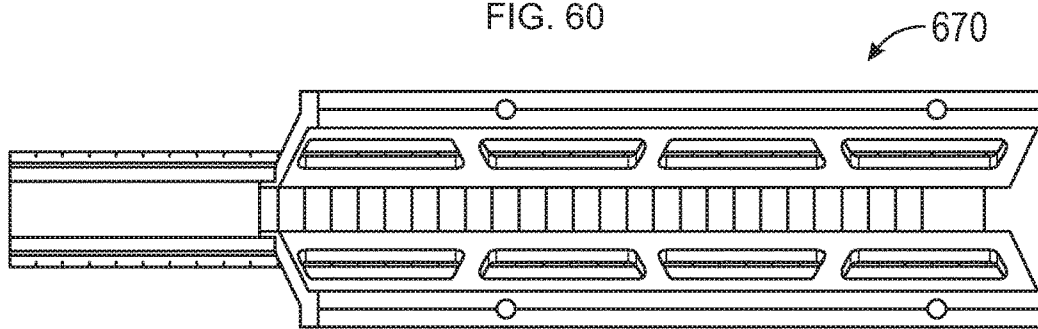


FIG. 61

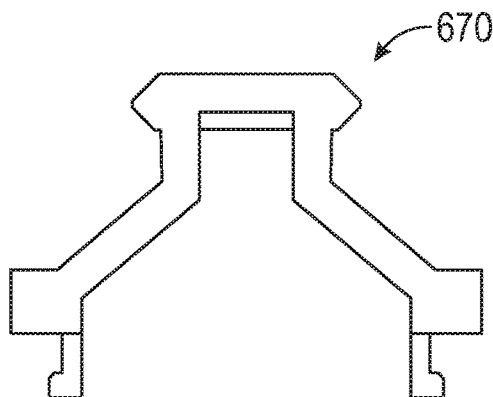


FIG. 62

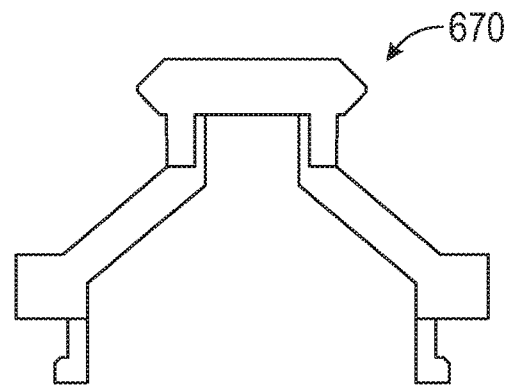


FIG. 63

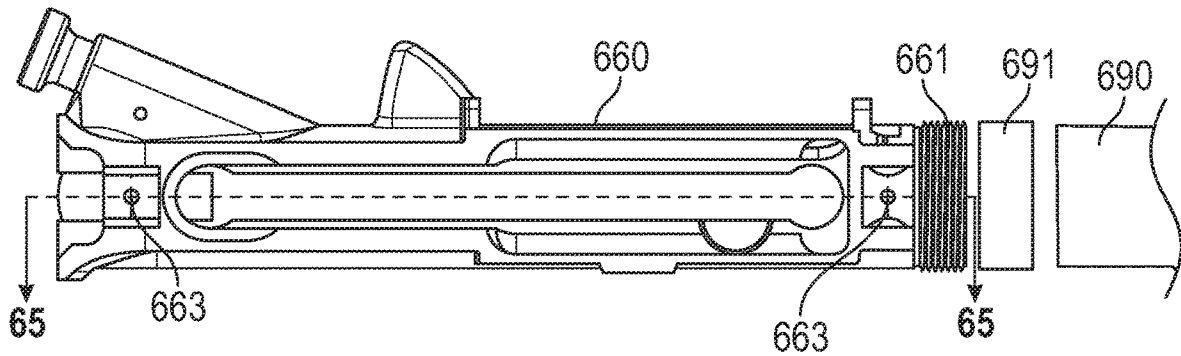


FIG. 64

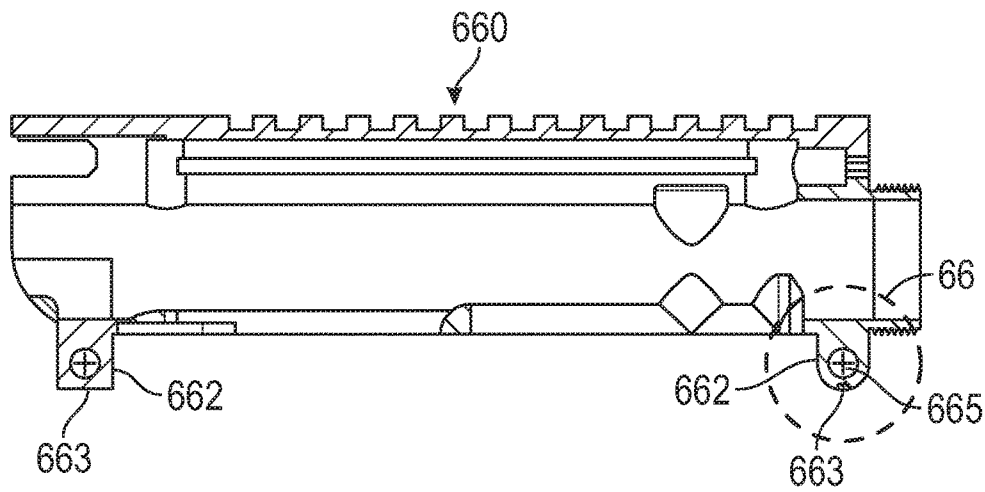


FIG. 65

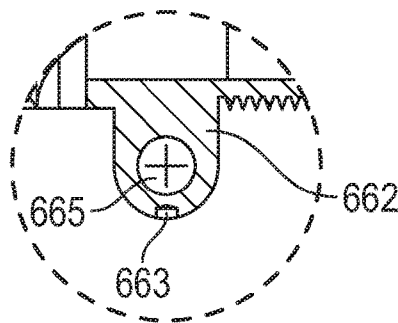


FIG. 66

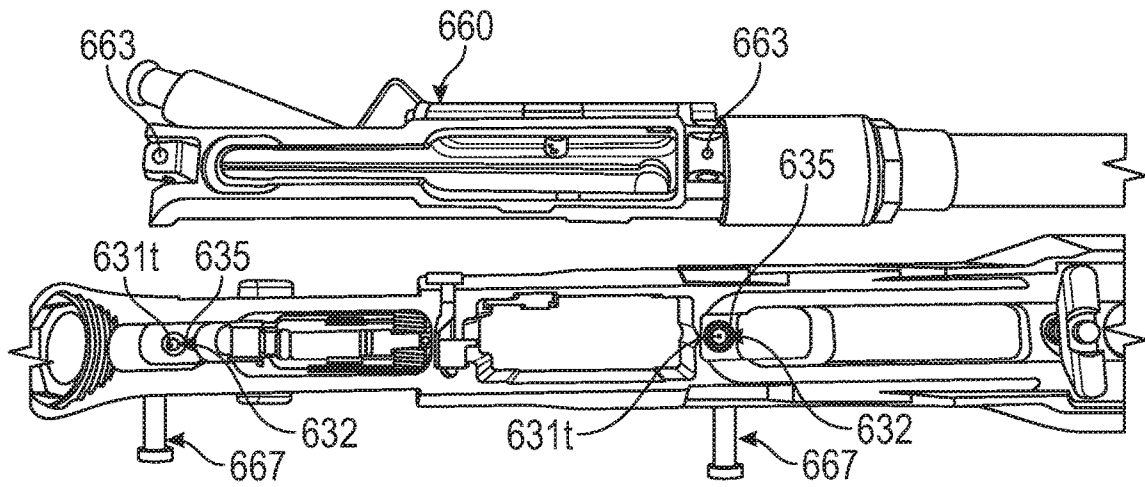


FIG. 67

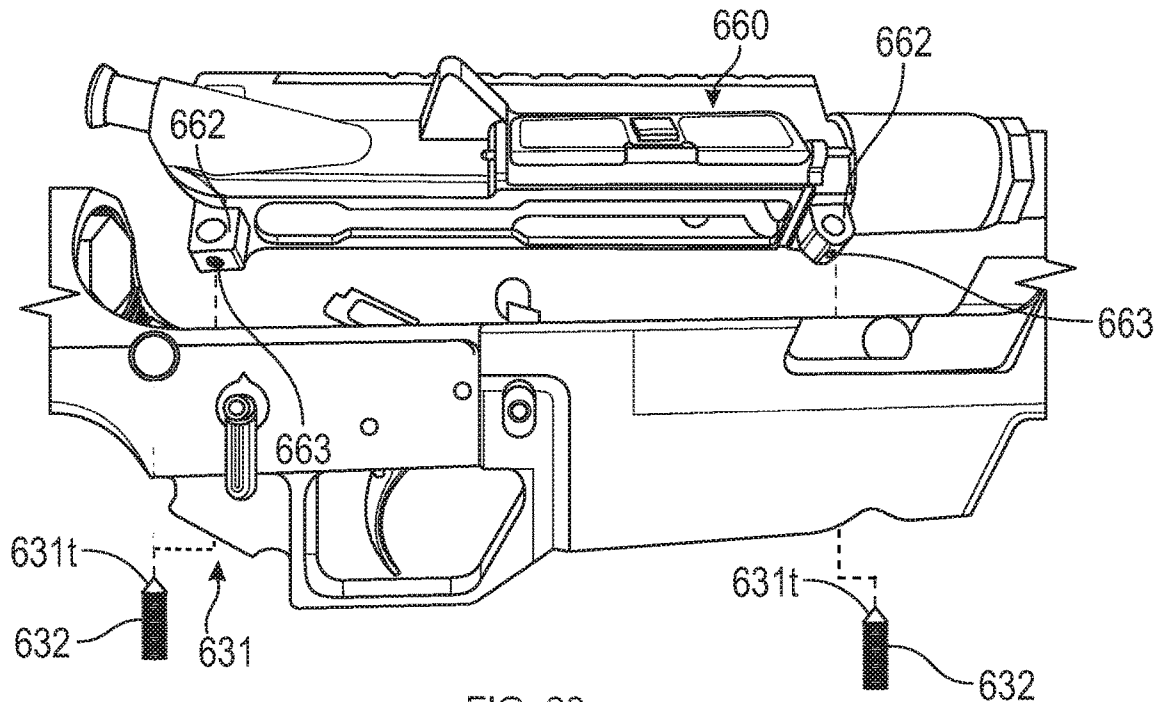


FIG. 68

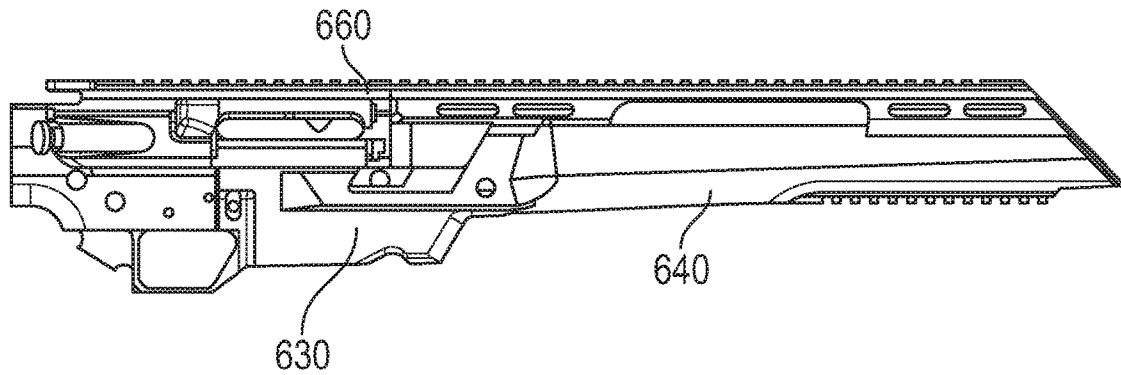


FIG. 69

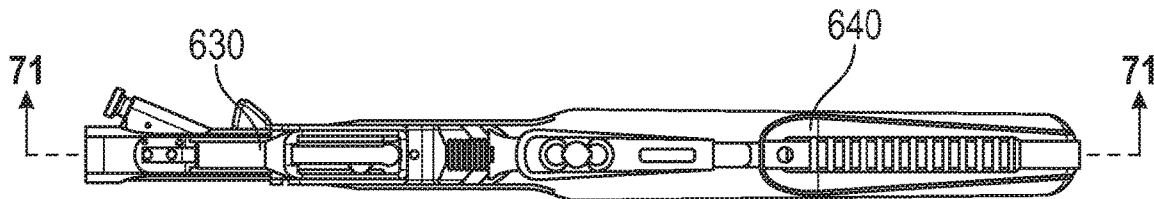


FIG. 70

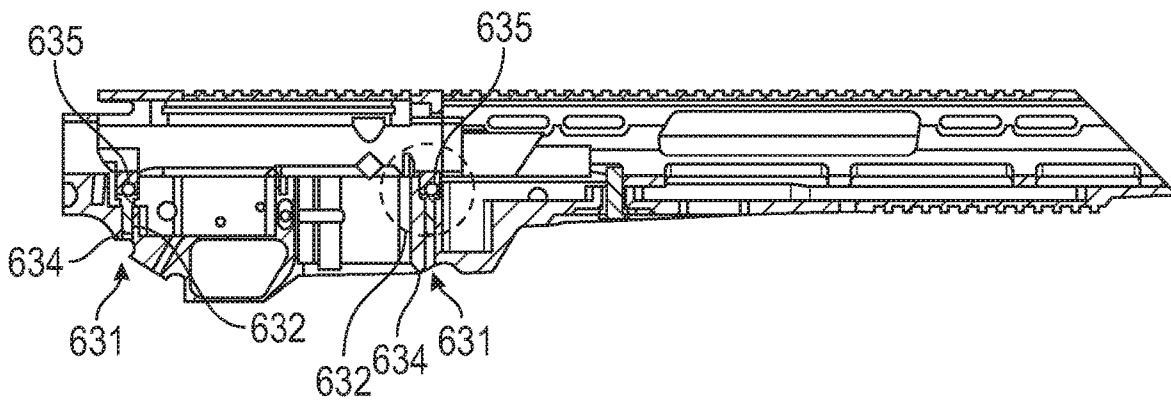


FIG. 71

CHASSIS OF SEMIAUTOMATIC RIFLESCROSS-REFERENCE TO RELATED
APPLICATIONS

This application is a continuation-in-part of U.S. patent application Ser. No. 16/272,836, filed on Feb. 11, 2019, which claims the benefit of, and priority to, U.S. Provisional Patent Application No. 62/739,673, filed Oct. 1, 2018.

U.S. patent application Ser. No. 16/272,836 is also a continuation-in-part of U.S. patent application Ser. No. 15/873,468, filed Jan. 17, 2018, now U.S. Pat. No. 10,203,178, which claims the benefit of, and priority to, U.S. Provisional Patent Application No. 62/446,898, filed Jan. 17, 2017. The entire contents of each of the above applications are incorporated by reference herein.

BACKGROUND

1. Technical Field

The present disclosure relates to firearms and, more specifically, to a chassis of a semiautomatic rifle (e.g., AR-10 and AR-15 style rifles including clones and hybrids thereof).

2. Discussion of Related Art

Modular rifle systems allow manufacturers to produce standard components of a rifle that allow dealers and end users to customize the rifle system. The major components of a modular rifle system are a stock, a chassis, a barrel, and an action. The chassis is the central component of the modular rifle system and may be integrally formed with the stock. The barrel and action each mount to the chassis.

SUMMARY

In an aspect of the present disclosure, the present disclosure relates to firearms and more specifically, to a tactical firearm system that is monolithically formed from the forearm to the stock mount, with a completely free floating upper receiver system for the utmost precision which allows for integration of modular weight systems. In embodiments, the adjustable system allows the user to customize the center of gravity of the rifle to maximize balance and performance as well as diminishing the effects of recoil. Specifically, unlike typical ARs which have handguards mounted directly to the barrel nut, a firearm of the present disclosure includes a lower receiver and handguard which can be milled from a single block of material (e.g. an aluminum billet). Accordingly, this monolithic design allows the entire barrel, including the barrel nut, to be free-floated for improved accuracy. Furthermore, the firearm technology/chassis system from bolt action performance of the present disclosure can be applied to a semi-automatic.

In aspects, the present disclosure relates to a firearm including a chassis having an adjustable precision rifle stock. The stock may allow for complete large and fine adjustments for fine tuning the stock to the shooter. In embodiments, the stock does not include wheels or knobs that are common to adjustable stocks that may get snagged or loosen during use. In embodiments, the firearm system may include a rail (e.g., ARCA rail) that runs the entire length of the forend with mounting points for additional rails, and accessories such as barricade stops or weight accessories. Weights may be mounted internally for a slick appearance, externally, or both externally and internally.

In aspects, the present disclosure relates to a firearm system with a toolless forend design where the forend locks in without a tool. The upper handguard also fastens to the lower handguard, not the upper receiver. In embodiments, this may provide a much more solid and tight seating for the upper receiver, while still utilizing the two standard receiver pins of an AR system. Accordingly, the vented upper section of the handguard is a modular piece that can be easily removed without the need for tools.

In further aspects, a firearm may include top-mounted Picatinny optics M-LOK accessory slots. Other accuracy enhancing features of the present disclosure may include an 11-degree target crown and a 2-stage competition trigger.

In aspects, a firearm chassis includes a lower receiver defining a trigger well configured to receive an action, a lower forend monolithically formed with the lower receiver and extending distally from the lower receiver, and an upper forend configured to slidably connect to the lower forend in a direction parallel to the lower forend. The lower forend defines a channel along a length thereof configured to receive a barrel. The lower receiver is configured support at least a majority of a weight of the barrel.

In aspects, the lower receiver may be configured to support an entirety of the weight of the barrel.

In aspects, the lower forend and the upper forend may be dimensioned to encapsulate the barrel and be spaced from the barrel along an entire length of the barrel.

In other aspects, the lower receiver may support the barrel thereon at a location proximal of a barrel nut of the barrel.

In more aspects, the lower forend may have a U-shaped transverse cross-sectional configuration.

In other aspects, the firearm chassis may include at least one weight disposed within the lower forend. The weight may be configured to move between at least two different locations along a length of the lower forend to adjust a center of mass of the chassis.

In aspects, the firearm chassis may include a fastening assembly configured to secure the lower forend and the upper forend to each other.

In further aspects, the fastening assembly may include a pin movably connected to the lower forend. The pin may be configured to engage the upper forend to selectively fix the upper forend to the lower forend.

In more aspects, the firearm chassis may include a biasing member configured to resiliently bias the pin into engagement with an opening defined in the upper forend.

In other aspects, the lower receiver may define a recess in a bottom surface thereof configured to receive a finger of a user. The recess may be disposed distally of the magazine well.

In aspects, the lower receiver may include a stock mount extending upwardly therefrom. The stock mount may define an opening that extends in a direction parallel with a longitudinal axis defined by the lower forend.

In accordance with another aspect, the present disclosure provides a firearm system that includes a chassis, an action, and a barrel. The chassis has an elongated lower receiver defining a trigger well, and an elongated lower forend extending distally from the lower receiver. The lower forend defines a longitudinally-extending channel. The action is configured to be received within the trigger well. The barrel is configured to be received within the channel and supported by the lower receiver.

In aspects, the lower forend and the lower receiver of the firearm system may be monolithically formed.

In some aspects, the firearm system may further include an elongated upper forend configured to detachably connect

to the lower forend. The upper forend and the lower forend may cooperatively define an enclosed, elongated channel dimensioned for receipt of the barrel.

In other aspects the lower forend and the upper forend of the firearm system may be configured to be spaced from the barrel along an entire length of the barrel.

In aspects, the lower receiver may support the barrel thereon at a location proximal of a barrel nut of the barrel, such that at least a majority of a weight of the barrel is supported by the lower receiver.

In the aspects, the firearm system may further include an upper receiver and a pair of first and second fasteners. The upper receiver may be configured to couple to the lower receiver and has a pair of proximal and distal tabs. Each of the tabs may define a vertically-oriented hole and the lower receiver may define a pair of vertically-oriented holes. The first and second fasteners may be configured for receipt in the corresponding holes of the upper receiver and the lower receiver to selectively secure the upper receiver to the lower receiver.

In aspects, the firearm system may further include first and second dowels. Each of the proximal and distal tabs of the upper receiver may further define a horizontally-oriented hole configured for receipt of the corresponding first and second dowels.

BRIEF DESCRIPTION OF THE DRAWINGS

Various aspects of the present disclosure are described hereinbelow with reference to the drawings, which are incorporated in and constitute a part of this specification, wherein:

FIG. 1 is a right side view of a firearm provided in accordance with the present disclosure including a barrel, an action, and a tactical chassis system having an integrated rail system;

FIG. 2 is a left side view of the firearm in FIG. 1;

FIG. 3 is a perspective view of the firearm in FIG. 1;

FIG. 4 is an upper back, side perspective view of a portion of the firearm of FIG. 1 illustrating the tactical chassis system, barrel, and action;

FIG. 5 is a front, side perspective view of the portion of the firearm of FIG. 4;

FIG. 6 is an enlarged front, side perspective view of the portion of the firearm of FIG. 4;

FIG. 7 is a lower back, side perspective view of the portion of the firearm of FIG. 4;

FIG. 8 is a side view of a portion of the firearm of FIG. 1 with a ridgeline grip provided in accordance with the present disclosure;

FIG. 9 is a lower perspective view of the portion of the firearm of FIG. 8;

FIG. 10 is a side view of another firearm provided in accordance with the present disclosure;

FIG. 11 is a side cross-sectional view of the firearm of FIG. 10;

FIG. 12 is a side view of a lower chassis of the firearm of FIG. 10;

FIG. 13 is a perspective view of the lower chassis of FIG. 12;

FIG. 14 is a top perspective view of the lower chassis of FIG. 12;

FIG. 15 is a bottom perspective view of the lower chassis of FIG. 12;

FIG. 16 is a side cross-sectional view of the lower chassis of FIG. 12;

FIG. 17 is a side view of an upper forend of the firearm of FIG. 10;

FIG. 18 is a perspective view of the upper forend of FIG. 17;

FIG. 19 is a front view of the upper forend of FIG. 17;

FIG. 20 is a side view of a body of the firearm of FIG. 10 including the lower chassis, the upper forend, and an upper carrier;

FIG. 21 is a side view, with parts separated, of the body of FIG. 20;

FIG. 22 is a perspective view of the body of FIG. 20;

FIG. 23 is a perspective view, with parts separated, of the body of FIG. 20;

FIG. 24 is a side cross-sectional view of the body of FIG. 20;

FIG. 25 is a side view of another firearm provided in accordance with the present disclosure;

FIG. 26 is a side cross-sectional view of the firearm of FIG. 25;

FIG. 27 is a perspective view of a firearm illustrating a weight disassembled from a chassis of the firearm;

FIG. 28 is a top perspective view, with an upper forend of the chassis removed, illustrating the weight connected to a lower forend of the chassis of FIG. 27;

FIG. 29 is a perspective view of the firearm of FIG. 27 illustrating the weight assembled to the chassis;

FIG. 30 is a side view of a portion of the firearm of FIG. 29;

FIG. 31 is a perspective view of a firearm provided in accordance with the present disclosure;

FIG. 31A is a side view of the firearm of FIG. 31, with parts removed, illustrating an upper forend of a chassis separated from the rest of the firearm;

FIG. 32 is a side view of a portion of the firearm arm of FIG. 31 illustrating the upper forend of the chassis connected to the rest of the firearm;

FIG. 33 is an enlarged view of a portion of the fire arm of FIG. 32 illustrating a fastening system for selectively securing the upper forend to the lower forend;

FIG. 34 is an enlarged view illustrating elements of the fastening system of FIG. 33 in a disassembled state;

FIG. 35 is a perspective view of the lower forend of the firearm of FIG. 31;

FIG. 36 is a right side view of the lower forend of FIG. 35;

FIG. 37 is a left side view of the lower forend of FIG. 35;

FIG. 38 is a top view of the lower forend of FIG. 35;

FIG. 39 is a bottom view of the lower forend of FIG. 35;

FIG. 40 is a rear view of the lower forend of FIG. 35;

FIG. 41 is a front view of the lower forend of FIG. 35;

FIG. 42 is a perspective view of an upper forend of the firearm of FIG. 31;

FIG. 43 is a right side view of the upper forend of FIG. 42;

FIG. 44 is a left side view of the upper forend of FIG. 42;

FIG. 45 is a top view of the upper forend of FIG. 42;

FIG. 46 is a bottom view of the upper forend of FIG. 42;

FIG. 47 is a rear view of the upper forend of FIG. 42;

FIG. 48 is a front view of the upper forend of FIG. 42;

FIG. 49 is a perspective view of a firearm provided in accordance with the present disclosure;

FIG. 50 is a right side view of the firearm of FIG. 49;

FIG. 51 is a left side view of the firearm of FIG. 49;

FIG. 52 is a right side view of a lower forend of the firearm of FIG. 49;

FIG. 53 is a perspective view of the lower forend of FIG. 52;

5

FIG. 54 is a bottom view of the lower forend of FIG. 52; FIG. 55 is a left side view of the lower forend of FIG. 52; FIG. 56 is a top view of the lower forend of FIG. 52; FIG. 57 is a front view of the lower forend of FIG. 52; FIG. 58 is a rear view of the lower forend of FIG. 52; FIG. 59 is a perspective view of an upper forend of the firearm of FIG. 49;

FIG. 60 is a left side view of the upper forend of FIG. 59; FIG. 61 is a bottom view of the upper forend of FIG. 59; FIG. 62 is a rear view of the upper forend of FIG. 59; FIG. 63 is a front view of the upper forend of FIG. 59; FIG. 64 is a bottom view of the upper receiver, the barrel nut, and a portion of the barrel, as shown in FIG. 49;

FIG. 65 is a side cross-sectional view of the upper receiver of FIG. 64;

FIG. 66 is an enlarged view of the area of detail indicated by "66" in FIG. 65;

FIG. 67 is a plan view, with parts separated, of a bottom of the lower receiver of FIG. 63 and a top of the upper receiver of FIG. 64

FIG. 68 is a side view of the upper carrier of FIG. 64 being assembled to the lower receiver of FIG. 67;

FIG. 69 is a side view illustrating the upper carrier of FIG. 64 connected to the lower receiver of FIG. 68;

FIG. 70 is a bottom view of the chassis shown in FIG. 69; and

FIG. 71 is cross-sectional view, taken along line A-A in FIG. 70, illustrating the upper carrier and lower receiver assembled to one another via the two fasteners.

DETAILED DESCRIPTION

Embodiments of the present disclosure are now described in detail with reference to the drawings in which like reference numerals designate identical or corresponding elements in each of the several views. Throughout this description, the term "proximal" refers to the portion of the device or component thereof that is closer to a butt of the firearm and the term "distal" refers to the portion of the device or component thereof that is closer to a muzzle or end of a barrel of the firearm.

As used herein, the terms parallel and perpendicular are understood to include relative configurations that are parallel and substantially perpendicular up to about + or -10 degrees from true parallel and true perpendicular.

A modular rifle system including a tactical chassis is described herein. The tactical chassis may include an integrated rail system. The integrated rail system may include a rail interface on the right, left, lower, and/or top surface of the chassis. The tactical chassis may be used with a variety of grips including a pistol grip or a ridgeline grip. The modular rifle system may include a semi-automatic action.

Further provided by the present disclosure is a chassis of a semiautomatic rifle, such as an AR-10 style or AR-15 style rifle, including a lower receiver for receiving the mechanical components of the rifle, a lower forend extending distally from the lower receiver, and an upper forend detachably coupled to the lower forend. The lower forend may be monolithically formed with the lower receiver or detachably connected thereto. The lower receiver is designed to support a majority, and in some instances an entirety, of the weight of a barrel/barrel nut/gas system of the rifle, thereby shifting the center of mass of the rifle proximally/rearwardly to improve accuracy of the rifle. When the upper forend is attached to the lower forend, for example, via a sliding

6

engagement, the upper and lower forends together encapsulate the entire length of the barrel without making contact with the barrel.

The lower receiver may include a barricade stop extending downwardly from a lower surface thereof. The barricade stop is located distally/frontward of a magazine well of the lower receiver. The lower receiver may further define a recess in the lower surface and adjacent the barricade stop. The recess is dimensioned to receive a finger (e.g., an index finger of a non-shooting hand) of the user to prevent the user from grasping a magazine of the rifle.

In another aspect of the present disclosure, the rifle may include one or more weights movably connected to the forend of the chassis. One or more of the weights may be moved to various locations along a length of the forend to adjust a center of gravity of the rifle. For example, the weights may be slid along an exterior or interior of the forend. In other aspects, the weights may be detached from the chassis and re-attached at a different location of the lower forend.

Referring to FIGS. 1-3, a modular rifle system 10 is provided in accordance with the present disclosure and includes a stock 12, a tactical chassis 20, a trigger mechanism 40, an action 50, a barrel 60, and a magazine (not explicitly shown). As shown, the action 50 is a .17 HMR semi-automatic action; however, the action 50 may be a variety of actions including, but not limited to, a .17 HRM action, a .22 LR action, a .22 Magnum action, a .308 action, a .410 action, a rimfire action, a short or long bolt action, a short or long semi-automatic action, a short or long action shotgun action, or a muzzle loader action.

The tactical chassis 20 includes sidewalls 22 that extend from a proximal portion 21 to a distal portion 39. The tactical chassis 20 defines a trigger well 24 (FIGS. 4 and 5) and a magazine well 26 and includes a forearm 36 that extends from the magazine well 26 to the distal portion 39 of the tactical chassis 20. The trigger well 24 receives the trigger mechanism 40 and the magazine well 26 receives a magazine. The magazine may be releasably secured within the magazine well or may be an internal magazine received within the forearm 36 of the tactical chassis 20.

The stock 12 is secured to the proximal portion 21 of the tactical chassis 20. The stock 12 may be integrally formed with or releasably secured to the proximal portion 21 of the tactical chassis 20. As shown, the stock 12 is an adjustable stock; however, the stock 12 may be a fixed stock, a folding stock, or an adjustable folding stock.

Referring now to FIG. 4, the sidewalls 22 of the tactical chassis 20 defines a proximal portion of a channel 28 above the trigger well 24 and the magazine well 26. The channel 28 receives the action 50 and the barrel 60. The proximal portion of the channel 28 cradles about 135° of the action 50 and the barrel 60 such that upper surfaces of the sidewalls 22 are positioned below a centerline of the action 50 and the barrel 60 adjacent the action 50 and the barrel 60.

With reference to FIGS. 4-6, the action 50 includes a slide 54 and defines a chamber 52 (FIG. 6). The slide 54 is slidable within the action 50 between a first configuration (FIG. 6) in which the slide 54 is in an open position to provide access to the chamber 52 and a second configuration (FIG. 4) in which the slide 54 is locked in a closed position such that the chamber 52 of the action 50 is closed. In the closed position, the chamber 52 is closed and the trigger mechanism 40 is actuatable to fire a cartridge (not shown) positioned within the chamber 52. The slide 54 includes a slide arm 56 that extends from and is secured to the slide 54. The slide arm 56 is engageable by an end user to manually

move the slide **54** between the closed position and the open position. The slide **54** may be biased towards the closed position. It will be appreciated that when the action **50** is a semi-automatic action, the action **50** will transition the slide **54** from the second configuration to the first configuration upon firing of the cartridge and the bias of the slide **54** will return the slide **54** to the second configuration such that the action **50** is prepared to fire a fresh cartridge loaded into the chamber **52**.

Referring now to FIGS. 1-7, the tactical chassis **20** is configured to receive a right-handed action **50**; however, it is contemplated that the chassis **20** may receive a left-handed or ambidextrous action. As shown, the action **50** is a right-handed action **50** allowing the chamber **52**, the slide **54**, and the slide arm **56** to be accessed from the right side of the modular rifle system **10**. In the closed position, the slide arm **56** is positioned at a distal end of a slide rail **58** within the action **50** as shown in FIG. 6. To move the slide **54** to the open position, the slide arm **56** is slid proximally along the slide rail **58**. When the slide arm **56** reaches a proximal end of the slide rail **58**, the action **50** is in a fully open position. As the slide **54** slides to the fully open position, a cartridge (not shown) may be ejected from the chamber **52**. In the right-handed configuration, the cartridge is ejected from the right side of the chamber **52**. As the slide **54** reaches the fully open position, a lower portion of the chamber **54** is opened to allow a new cartridge from the magazine (not shown) to enter the chamber **52**. Alternatively, a new cartridge may be placed directly into the chamber **52** when the slide **54** is in the open position.

When a new cartridge is within the chamber **52**, the slide arm **56** is engaged to slide the slide **54** distally towards the closed position. As the slide **54** slides distally along the slide rail **58**, the new cartridge is positioned or loaded into the chamber **52**. When the slide **54** reaches the closed position, the slide arm **56** is located at the distal end of the slide rail **58**. The slide **54** may be biased towards the closed position such that the slide **54** automatically slides distally to load the new cartridge and to close the chamber **52**.

Referring now to FIG. 5, the forearm **36** includes rail portions **23** that extend from the forearm **36** such that each of the rail portions **23** extends above the centerline of the barrel **60**. Each of the rail portions **23** defines a rail interface system **92** (FIG. 1) that is monolithically formed with the tactical chassis **20** such that the tactical chassis **20** is configured to receive accessories as detailed below. Additionally, or alternatively, a lower surface of the forearm **36** may define a lower rail interface system **94** configured to receive accessories. For example, the lower rail interface system **94** may receive a bipod **98** (FIG. 1). In addition, the lower rail interface system **94** may receive a foregrip (not shown)

As shown, the rail interface system **92** and the lower rail interface system **94** are M-LOK® rail systems, which is a rail system that is commonly known in the art and is shaped to receive M-LOK® accessories. It is also contemplated that other rail systems that are commonly known in the art may be monolithically formed in the rail portions **23** and lower portion of the forearm **36** of the tactical chassis **20** including, but not limited to, a Picatinny rail system, a KeyMod rail system, or other rail systems as will be familiar to the skilled practitioner.

Referring back to FIGS. 1-3, the modular rifle system **10** includes a pistol grip **80** that protrudes conspicuously below the action **50** of the rifle **10** to allow for a pistol style grasp in which the web of the trigger hand (between the thumb and index finger) can be placed below the top exposed portion of

the trigger mechanism **40** while firing. The pistol grip **80** includes an upper portion **84** that forms an elliptical shape such that the web of the firing hand can rest comfortably below the top exposed portion of the trigger mechanism **40** and a lower portion **86** that extends proximally and downward to form an acute angle with respect to the proximal portion **21** of the tactical chassis **20**. It is contemplated that the upper portion **84** of the pistol grip **80** may form different shapes to receive the web of the firing hand and that the lower portion **86** of the pistol grip **80** may protrude from the chassis **20** at any angle to allow for a pistol style grasp.

The pistol grip **80** has a proximal side **88** that is contoured to receive a palm of a firing hand. It is contemplated that the contour of the proximal side **88** may take on any shape to comfortably receive the palm of the user's hand. The pistol grip **80** has a distal side **89** that contains ridges to receive non-trigger fingers of a firing hand of an end user. It is contemplated that the ridges may take on any shape or depth to comfortably receive the non-trigger fingers. It is also contemplated that the distal side **89** of the pistol grip **80** may be smooth. The distal side **89** may include an upper end portion **87** that is contoured to sit flush with a radius of a trigger guard **42** of the trigger mechanism **40**. The pistol grip **80** is secured to the tactical chassis **20** by a fastener **82** (FIG. 9) that passes through the upper end portion **87**.

Referring now to FIGS. 8 and 9, a ridgeline grip **180** is provided in accordance with the present disclosure. The ridgeline grip **180** is secured to a lower surface **18** of the proximal portion **21** of the tactical chassis **20** by a fastener **82** (FIG. 9). The ridgeline grip **180** includes a connecting surface **185** that is secured to the tactical chassis **20** with the fastener **82** such that the connecting surface **185** of the ridgeline grip **180** is flush with the lower surface **18** of the tactical chassis **20**. When the ridgeline grip **180** is secured to the tactical chassis **20**, the ridgeline grip **180** extends from the trigger guard **42** of the trigger mechanism **40** to a proximal well **27** of the proximal portion **21** of the tactical chassis **20**.

The connecting surface **185** of the ridgeline grip **180** forms a corner with a proximal well wall **181** that descends a short distance to an exposed upper surface **182** of the ridgeline grip **180**. The upper surface **182** of the ridgeline grip **180** extends proximally from the proximal well wall **181** beyond a proximal end of the proximal portion **21** of the tactical chassis **20** such that a portion of the upper surface **182** opposes the stock **12**. As shown, a proximal tip **183** of the ridgeline grip **180** forms an angled surface **184** between the exposed upper surface **182** and a back edge **186** of the ridgeline grip **180**. The backside wall **186** extends from the angled surface **184** to a lower tip **189** of the ridgeline grip **180**. The angled surface **184** and the back edge **186** of the ridgeline grip **180** may meet at a variety of angles. The angled surface **184** may be a smooth curve or a plurality of surfaces to form polygonal shape when viewed from the side between the exposed upper surface **182** and the back edge **186**.

The ridged face **188** of the ridgeline grip **180** extends from the lower tip **189** to a distal strut **187** of the ridgeline grip **180**. The ridged face **188** of the ridgeline grip includes distinct ridges **190** to receive non-trigger fingers of a firing hand. As shown, the ridges **190** are radial in shape; however, it is contemplated that the ridges **190** may take on any shape or depth to comfortably receive non-trigger fingers. The distal strut **187** of the ridgeline grip **180** is contoured to sit flush with the trigger guard **42** of the trigger mechanism **40** such that the distal strut **187** flushingly receives the trigger guard **42**.

The ridgeline grip **180** protrudes slightly below the trigger guard **42** of the modular rifle system **10** to allow for a rifle style grasp in which the web of the trigger hand can be placed above, or at the same level as, the top exposed portion of the trigger mechanism **40** during firing. The ridgeline grip **180** extends below the action to a lesser extent than the pistol grip **80** (FIG. 1) and does not allow for a pistol style grasp.

With particular reference to FIG. 9, the ridgeline grip **180** is secured to the tactical chassis **20** by the fastener **82**. The fastener **82** passes through the distal strut **187** of the ridgeline grip **180** to secure the ridgeline grip **180** to the proximal portion **21** of the tactical chassis **20**.

It is contemplated that a tactical chassis (e.g., tactical chassis **20**) and grip (e.g., pistol grip **80** or ridgeline grip **180**) may be constructed from the same material or made from different materials. Contemplated materials for the chassis and grips include, but are not limited to, natural materials (e.g. wood), man-made materials (e.g., Kevlar), composite materials (e.g., carbon fiber), metals, metal alloys, synthetic materials, laminated materials, compressed woven materials, and any combination thereof.

With reference to FIGS. 10 and 11, another firearm **200** is provided in accordance with the present disclosure which includes a stock **210**, a lower chassis **220**, an upper receiver **260**, an upper forend **270**, an action **283**, a magazine **285**, a grip **287**, a barrel **290**, and a break **292** secured to the barrel **290**.

Referring to FIGS. 12-16, the lower chassis **220** includes, from a proximal end to a distal end, a stock mount **212**, a lower receiver **230**, and a lower forend **240**. The entire lower chassis **220** is monolithically formed which may form a stable platform for components of a rifle system. Forming a stable platform may improve the accuracy and/or precision of a firearm, e.g., firearm **200** (FIG. 10), built on the lower chassis **220**. In addition, by having the lower receiver **230** monolithically formed in the lower chassis **220**, the lower chassis **220** may be considered a registered firearm.

The stock mount **212** defines a distal portion of the lower chassis **220** and is substantially circular in shape. The stock mount **212** is configured to secure a stock, e.g., stock **210** (FIG. 10), to the lower chassis **220**. An inner surface **213** of the stock mount **212** may be threaded such that a stock may be threaded into the stock mount **212**. In some embodiments, a bugger tube (not shown) passes through the stock mount **212**. In some embodiments, the stock mount **212** is separate from the lower chassis **220** and is secured to the lower chassis **220** by one or more fasteners or a fastening system (not shown). In certain embodiments, the stock mount **212** is monolithically formed, integrally formed, or secured to the upper receiver **260** (FIG. 10).

With particular reference to FIG. 16, the lower receiver **230** includes a trigger well **232**, a magazine well **234**, and a grip mount **236**. The trigger well **232** is configured to at least partially receive an action, e.g., action **283** (FIG. 11). The action **283** may be any suitable action. For example, the action **283** may be rimfire or center fire, may be semi-automatic or fully automatic, and may be a variety of calibers, e.g., 0.17, 0.17-223, 0.20, 0.204, 0.220, 0.222, 0.223, 0.22, 0.224, 0.243, 0.25, 0.270, 0.277, 0.30, 0.300, 0.30-06, 0.308, 0.338, 0.358, 0.375, 0.45, 0.500, 5.45, 5.56, 6 mm, 6.5 mm, 7 mm, 20 Gauge, 12 Gauge, .410, etc. In some embodiments, the lower receiver **230** is an AR-15, AR-10, or a clone equivalent or modified clone equivalent thereof.

The magazine well **234** is configured to receive a magazine, e.g., magazine **285** (FIG. 11), that may be fixed to or removable from the lower receiver **230** and configured to

hold one or more cartridges of suitable ammunition for the action **283** received in the trigger well **232**. As shown, the magazine well **234** is positioned distal of the trigger well **232**; however, the magazine well **234** may be positioned proximal of the trigger well **232**. The magazine well **44** is configured to feed cartridges into a chamber as detailed below.

The grip mount **236** is configured to secure a grip, e.g., grip **287** (FIG. 11) to the lower receiver **230**. The grip may be any suitable grip, e.g., a pistol grip or a ridgeline grip. In some embodiments, no grip is secured to the grip mount **236**.

The lower receiver **230** may also include openings **238** that are configured to receive fasteners to secure components, e.g., a magazine, an action, or a grip, to the lower receiver **230**. The lower chassis **220** may also include openings **222** that are configured to receive fasteners to secure the upper receiver **260** and/or the upper forend **270** to the lower chassis **220**.

The lower forend **240** of the lower chassis **220** is substantially U-shaped in lateral cross-section to define a channel **242** therein. Channel **242** is configured to receive a barrel, e.g., barrel **290** (FIG. 11). The lower forend **240** has one or more flat surfaces **244a**, **244b**, **244c** (FIGS. 14 and 15) that may include mounting systems such as rails integrally formed thereon. For example, the lower surface **244b** of the lower forend **240** includes a lower rail **245** that is configured to mount one more accessory, e.g., a strap, bipod, tripod, light, laser sight, etc., to the lower chassis **220**. The lower rail **245** extends longitudinally along the lower surface **244b** such that the one or more accessories to be mounted in a plurality positions longitudinally spaced apart from one another along the lower rail **245**. In some embodiments, the lower rail **245** is monolithically formed in the lower surface **244b** of the lower forend **240**. Alternately, the lower rail **245** may be secured to the lower surface **244b** by one or more fasteners.

The lower forend **240** extends distally from the magazine well **234**. As shown, the lower forend **240** is monolithically formed with the lower receiver **230**. In some embodiments, the lower forend **240** may be formed of one or more components. For example, the lower forend **240** may have a proximal portion that is monolithically formed with the lower receiver **230** and extends distally from the magazine well **234** and is then secured to a distal portion of the lower forend **240** by one or more fasteners. The proximal portion of the lower forend **240** may extend distally in a range of about 0.5 inches to about 28 inches from the magazine well **234**. Extending the lower forend **240** has shown to increase the precision and accuracy of firearms based on a chassis with a monolithically formed lower forend **240**.

With particular reference to FIGS. 17-19, the upper forend **270** is configured to integrally join with the lower chassis **220** over the lower forend **240**. The upper forend **270** has a pair of proximal legs **274** and a pair of distal legs **276** which are each laterally spaced apart to define an upper channel **272** therebetween. The pair of proximal legs **274** and the pair of distal legs **276** are longitudinally spaced apart from one another along the upper channel **272**. Each of the proximal legs **274** and distal legs **276** may include a lower mounting surface **275**, **277** that is secured to the lower forend **240**. The lower mounting surfaces **275**, **277** may receive a fastener to secure each of the proximal and distal legs **274**, **276** to the lower forend **240**. In some embodiments, the each of the lower mounting surfaces **275**, **277** include a portion of a fastening system, e.g., a portion of a slide lock, that interfaces with another portion of the fastening system on the lower forend **240** to secure the upper forend **270** with the

lower forend **240** of the lower chassis **220**. In some embodiments, the lower mounting surfaces **275**, **277** are welded to the lower forend **240**.

In embodiments, the upper forend **270** is monolithically formed with the lower forend **240** of the lower chassis **220**. When the upper forend **270** is monolithically formed with the lower forend **240**, the proximal and distal legs **274**, **276** may not extend into the lower forend **240** and be formed with the lower forend **240** along a center line of the channel **242**.

The upper channel **272** may form a portion of the channel **242** and receive a portion of a barrel, e.g., barrel **290** (FIG. **10**). The upper forend **270** may include a top rail **279** that extends along a length of an upper surface thereof. The top rail **279** may extend along a substantial or entire length of the upper surface of the upper forend **270**. The proximal legs **274** may include angled surfaces which include an angled rail **278**. The angled rail **278** extends in a direction parallel to a longitudinal axis of the upper channel **272** and is radially offset to the top rail **279** at an angle in a range of about 15 degrees to about 90 degrees about the longitudinal axis of the upper channel **272**. As shown in FIG. **18**, the angled rail **278** is offset about 30 degrees from the top rail **279**. The upper forend **270** may include an angled rail **278** on one or both of the proximal legs **274**. In some embodiments, the upper forend **270** is provided without an angled rail **278**. In other embodiments, the upper forend **270** includes an angled rail **278** on each of the proximal and distal legs **272**, **274**. In certain embodiments, the upper forend **270** includes an angled rail **278** that is continuous from a proximal leg **274** to a distal leg **276**. In particular embodiments, one or more of the proximal legs **274** includes an angled rail **278** offset at a first angle, e.g., about 45 degrees, and one or more of the distal legs **276** includes an angled rail **278** offset at a second angle, e.g., about 90 degrees, that is different from the first angle.

With additional reference to FIGS. **20-24**, the lower chassis **220**, the upper receiver **260**, and the upper forend **270** form a body **218** for a firearm, e.g., firearm **200** (FIG. **10**). The lower chassis **220** and the upper forend **270** may be monolithically or integrally formed with one another. In some embodiments, the upper receiver **260** and the upper forend **270** are monolithically or integrally formed with one another. In embodiments, the lower chassis **220**, the upper receiver **260**, and the upper forend **270** are monolithically or integrally formed with one another.

With particular reference to FIG. **24**, the upper receiver **260** secures over the trigger well **232** and the magazine well **234** of the lower chassis **220**. The upper receiver **260** may partially receive a portion of an action therein, e.g., action **283** (FIG. **11**). For example, as shown in FIG. **11**, a bolt carrier **280** may be received within the upper receiver **260**. The upper receiver **260** may be secured to the lower receiver **230** of the lower chassis **220** by one or more fasteners passing through legs or tabs **262** of the upper receiver **260**. The upper receiver **260** may also include an upper rail **264** that extends along an upper surface of the upper receiver **260**. The upper rail **264** may form a continuous rail with the top rail **279** of the upper forend **270**. While not shown, the upper receiver **260** may include one more angled rails similar to the angled rails **278** detailed above.

The upper receiver **260** may also include an upper rail **264** that extends along an upper surface of the upper receiver **260**. The upper rail **264** may form a continuous rail with the top rail **279** of the upper forend **270**. While not shown, the upper receiver **260** may include one more angled rails similar to the angled rails **278** detailed above.

The body **218** may include a plurality of rails as detailed individually above. For example, the lower chassis **220** may include the lower rail **245**, the upper receiver **260** may include an upper rail **264**, and the upper forend **270** may include one or more angled rails **278** and an upper rail **279**. The rails **245**, **264**, **278**, **279** may be used to mount one or more accessories to the firearm **200**, e.g., light **292** or scope **294** (FIG. **10**). The upper rails **264**, **279** may form a single continuous rail with a portion of a single accessory being mounted or secured to each of the upper rails **264**, **279**.

With reference to FIGS. **25** and **26**, another firearm **300** is provided in accordance with the present disclosure. The firearm **300** includes several components that are similar to the components of firearm **200** detailed above with similar components having similar labels with a "3" replacing the "2" of the previous label, e.g., the upper carrier **360** of firearm **300** is similar to the upper receiver **260** of firearm **200**. For reasons of brevity selected differences between firearm **300** and firearm **200** will be detailed below.

The firearm **300** includes a lower chassis **320** monolithically formed with an upper forend **370** which define a channel **342** therebetween to receive a barrel **390**. The upper carrier **360** is secured to the lower chassis **320** by fasteners passed through tabs **362** as shown in FIG. **25**. An action **383** is disposed within a trigger well **333** of a lower receiver **330** of the lower chassis **320** before the upper carrier **360** is secured thereto. The firearm **300** also includes a magazine **385**, a pistol grip **387**, and a stock **310**. Channel **342** may be further configured to receive accessories, e.g., a weight **401**.

With reference to FIGS. **27-30**, an alternative embodiment of a firearm **400** is provided, similar to the firearms described above. For reasons of brevity, only selected differences between firearm **400** and the firearms above are detailed below.

The firearm **400** may be a semi-automatic firearm, such as, for example, an AR-10 or AR-15 style rifle (including clones and hybrids thereof) including features that may enable performance substantially similar to a Bolt action firearm. The firearm **400** generally includes a firearm chassis **402** (FIG. **27**) and a barrel **490** (e.g., a 16, 18 or 20 inch barrel) supported in the chassis **402**. The chassis **402** includes a lower receiver **430** and a lower forend **440** milled from a single material (e.g. aluminum billet). In aspects, the chassis **402** may be formed from a plastic. In other aspects, the lower receiver **430** and the lower forend **440** may be integrally connected to one another via a suitable fastening engagement rather than being monolithically formed. The lower forend **440** defines a lower channel **442** along a length thereof allowing the barrel **490**, including a barrel nut **492** (FIGS. **27**, **30**), to be free-floating within the lower forend **440**. The lower forend **440** may define a picatinny rail **436** along a bottom surface **438** thereof or any other suitable rail system.

The chassis **402** further includes an upper forend **470** detachably coupled to the lower forend **440**. The upper forend **470** is slidably coupled to the lower forend **440** to allow for detachment of the upper forend **470** from the lower forend **440**. In aspects, the upper forend **470** may be detachably connected to the lower forend **440** via other fastening engagements, such as, for example, a snap-fit engagement.

The upper forend **470** defines an upper channel **472**. When the upper forend **470** is coupled to the lower forend **440**, the lower and upper channels **442**, **472** of the respective forends **440**, **470** together define an enclosed channel or lumen **445** therethrough dimensioned for receipt of the barrel **490**. The lumen **445** has a diameter sized so that the inner surfaces of the lower and upper forends **440**, **470**

remain out of contact with the barrel 490 along the length of the barrel 490. Having the barrel 490 spaced inwardly from the inner periphery of the upper and lower forends 470, 440 has been found to improve accuracy.

The lower receiver 430 supports the proximal end of the barrel 490 (e.g., the barrel nut 492), such that a majority, and in some instances an entirety, of the weight of the barrel 490 (and gas line) is supported by the lower receiver 430. The barrel nut 492 is configured to connect to a proximal end of the barrel 490 or otherwise form a part of the proximal end of the barrel 490. The lower receiver 430 includes a barricade stop 403 (FIG. 30) protruding downwardly therefrom and defines a relief cut or recess 441 disposed between a magazine well 434 of the lower receiver 430 and a proximal end of the lower forend 440. The relief cut 441 may be placed in front of the magazine well 434 where a user's finger can rest, keeping the user's hand off of a magazine 447 of the firearm 400.

The firearm 400 further includes a weight 401 movably coupled to the lower forend 440. As best shown in FIG. 28, the weight 401 is slidably received in the channel 442 of the lower forend 440 without contacting the barrel 490 and being prevented from moving into the lower receiver 430. Longitudinal movement of the weight 401 to different positions along the length of the lower forend 440 adjusts a center of mass of the firearm 400. In other aspects, the weight 401 may be attached to an exterior surface of the lower or upper forends 440, 470. The firearm 400 can be configured to isolate the lower receiver 430 from outside influences (e.g., the force exerted by weight 401). Further, the lower forend 440 may include anchoring components that may aid with fixing the weight 401 to the firearm 400, e.g., a row of longitudinally-spaced openings 425 defined in the lower forend 440.

For example, the weight 401 may include a tab or protrusion (not explicitly shown) configured for removable receipt in the respective openings 425 of the lower forend 440 to selectively fix the weight 401 in an axial position within the lower forend 440. In other aspects, the weight 401 may define a conduit 403 transversely therethrough dimensioned for receipt of a fastener, such as, for example, a bolt (not explicitly shown). During use, a user may connect weight 401 to a selected axial position along the lower forend 440 by inserting the bolt through the opening 403 of the weight 401 and the selected opening 425 to ultimately restrict or substantially limit axial movement of the weight 401 relative to the lower forend 440. In other aspects, the weight 401 may be magnetic or metallic and the lower forend 440 may have a plurality of longitudinally-spaced magnetic or metallic elements to which the magnetic weight 401 is magnetically attracted to allow for the selective fixation of the weight 401 along various axial positions of the lower forend 440.

The weight 401 is an accessory configured to connect to firearm 400 or any of the above-listed firearms and is shown having a rectangular shape. However, weight 401 may have other shapes such as circular, triangular, trapezoidal, or other suitable shapes. The weight 401 is configured to increase the weight of the firearm 400 or a portion thereof.

With reference to FIGS. 31-49, yet another alternative embodiment of a firearm 500 is provided, similar to the firearm 400 described above. For reasons of brevity, only selected differences between firearm 500 and firearm 400 may be detailed below.

Firearm 500 includes a chassis 502 and a barrel 590 supported in the chassis 502. The chassis 502 includes an upper forend 570 slidably connected to a lower forend 540.

As shown in FIG. 31A, the upper forend 570 is configured to operably slide into the lower forend 540. Further, as seen in FIGS. 32-34, the firearm 500 includes a fastening assembly 581 configured to enable connection and disconnection between the upper forend 570 and the lower forend 540.

The fastening assembly 581 includes a dowel pin 505 slidably supported in a proximal end of the lower forend 540, a connector piece 506 fixed in a proximal end of the upper forend 540, and a biasing member, such as, for example, a coil spring 507 disposed about the pin 505. The pin 505 has an annular flange 509 extending radially outward from a bottom end thereof. The flange 509 protrudes from a bottom surface of the lower forend 540 and is configured to be grasped by a user. The coil spring 507 is disposed about the pin 505 and supported at one end by the flange 509. The coil spring 507 resiliently biases the pin 505 inwardly (e.g., towards the upper forend 570) to position an upper end 511 of the pin 505 in an opening 513 defined in the connector piece 506 of the upper forend 570. In this way, upon assembling the upper forend 570 to the lower forend 540, the coil spring 507 drives the pin 505 into the opening 513 to axial fix the upper forend 570 to the lower forend 540. To release the upper forend 570 from the lower forend 540, a user may grasp and pull the pin against the resilient bias of the coil spring 507 to disengage the pin 505 from the opening 513, thereby allowing for sliding disengagement of the upper forend 570 from the lower forend 540. As such, the dowel pin 505 may be configured as a quick release element that allows for a manual disengagement of the forend 570 from the forend 540 without requiring a tool.

In other aspects, the fastening assembly 581 may be alternately configured as, e.g., a screw and a threaded hole, such as the one shown in FIG. 11. Additionally, although shown and described with reference to the pull knob/pin 505 connected to the lower forend 540 and configured to operably engage the connector piece 506 connected to the upper forend 570, it is understood that alternatively the pull knob 505 may be connected to the upper forend 570 and the connector piece 506 connected to the lower forend 540.

In embodiments, the firearm 500 may be configured in such a way that selected elements, e.g., the barrel 590, a gas system 591, and/or a barrel nut 592 (FIG. 32), do not contact the lower forend 540 and/or the upper forend 570. Thus, a force applied to any of the forends 540 or 570 may not exert a substantial force to enable a deflection of the barrel 590, e.g., the force of a weight (e.g., weight 401) connected to the lower end 540 may not displace to barrel 590 or ultimately affect the accuracy of firearm 500. In another example, the firearm 500 can be configured to connect to a stand or support 592 (e.g., a bipod), where the stand or support 592 provides zero to minimum stress to the barrel 590. Specifically, when the bipod 592 is connected to the lower forend 540 and disposed on a surface, the upward force from the bipod 592 is distributed and canceled by the lower forend 540 (and the upper forend 570, when the upper forend 570 is connected to the lower forend 540), which ultimately may increase accuracy and proper alignment of a receiver set having a positive lock up. Additional advantages may include the alignment of barrel 590 being true and accurate.

With reference to FIGS. 49-63, an alternative embodiment of a firearm 600 is provided, similar to firearms 400, 500. For reasons of brevity, only selected differences between firearm 600 and firearms 400, 500 may be detailed below.

The firearm 600 includes a chassis 602 and a barrel 690 supported in and by the chassis 602. The chassis 602 has a lower receiver 630, a lower forend 640 extending distally

from and formed with the lower receiver 630, and an upper forend 670 configured to slidably connect to the lower forend 640. Each of the upper and lower forends 640, 670 are elongated and extend distally from the lower receiver 630. The upper forend 670 has a substantially V-shaped cross-section and is shorter in length when compared to the lower receiver 630.

With particular reference to FIGS. 64-71, the upper receiver 660 includes a threaded portion 661 configured to operably connect to the barrel 690 via barrel nut 691. The barrel nut 691 secures barrel 690 to the upper receiver 660. As mentioned above, the barrel nut 691 is free floating. As shown in FIG. 69, the lower receiver 630 and the lower forend 640 are monolithically formed.

The upper receiver 660 is configured to detachably couple to the lower receiver 630 via a pair of proximal and distal tabs 662 that extend downwardly from a bottom of upper receiver 660. Each tab 662 defines vertically-extending indexing holes or pockets 663 configured for receipt of a corresponding fastener 632, and horizontally-extending holes 665 (FIGS. 65-66) configured for receipt of a corresponding dowel 667 (FIG. 67). In aspects, the pockets 663 may extend perpendicularly relative to the holes 665. It is contemplated that the pockets 663 only extend partially through the tabs 662 without extending into the holes 665.

Lower receiver 630 includes a pair of proximal and distal through holes 631 (FIG. 71) configured to align with the corresponding pair of proximal and distal alignment pockets 663 of upper receiver 660 upon assembling the upper receiver 660 to the lower receiver 630. Each hole 631 is configured to receive the fastener 632 (e.g., a set screw) and defines a lower opening 634 and an upper opening 635. In aspects, lower opening 634 may define a larger diameter than the diameter of the upper opening 635.

The fasteners 632 have a tip 631t having a conical shape configured for passage through the upper opening 635 of hole 631. In aspects, the tips 631t may assume any suitable shape and size configured for receipt in the corresponding alignment pockets 663. The tips 631t of the fasteners 631 are configured to engage the alignment pockets 663 and exert a vertically-oriented force on the upper receiver 660 to ultimately aid with setting an accurate linear alignment between the upper receiver 660 and the lower receiver 630.

During assembly, with the upper receiver 660 coupled to the lower receiver 630, the dowels 667 may be inserted into horizontal holes in the lower receiver 630 and the corresponding holes 665 in the upper receiver 660 to fix the upper receiver 660 to the lower receiver 630. The fasteners 631 are then screwed or otherwise inserted upwardly through the holes 631 in the lower receiver 630 and into the alignment pockets 663 of the upper receiver 660. The tips 631t of the fasteners 632 engage the pockets 663 of the upper receiver 660, thereby exerting an upwardly-oriented force on the upper receiver 660 relative to the lower receiver 630 to increase the frictional engagement between the dowel 667, the lower receiver 630, and the upper receiver 660. This may ultimately aid to eliminate any movement of the upper receiver 660 with respect to the lower receiver 630.

The firearms or portions thereof, e.g., firearms 200-600 detailed above, e.g., the chassis 220, 320, 402, 502, 602 may be used with a variety of firearms including, but not limited to, bolt action firearms, shotguns, semi-automatic firearms, pistols, or fully automatic firearms. Specifically, the modular rifle system may be designed for AR15/M4/M16 and AR10/M110 semiautomatic rifle uppers—inclusive of clone variants and upper receivers that use parts in common with the rifle uppers.

It is envisioned that the firearm system of the present disclosure is capable of printing, on average, about 0.6- to about 0.7-MOA groups at over 100 yards, with the best groups forming up at just over 0.3 MOA when firing commercially produced Federal match-grade ammunition. With an 18" Satern heavy-profile barrel installed, it is envisioned that the platform of the present disclosure is able to produce sub-MOA accuracy out to about 1062 yards.

While several embodiments of the disclosure have been shown in the drawings, it is not intended that the disclosure be limited thereto, as it is intended that the disclosure be as broad in scope as the art will allow and that the specification be read likewise. Any combination of the above embodiments is also envisioned and is within the scope of the appended claims. Therefore, the above description should not be construed as limiting, but merely as exemplifications of particular embodiments. Those skilled in the art will envision other modifications within the scope of the claims appended hereto.

What is claimed:

1. A firearm chassis, comprising:

a lower receiver defining a trigger well configured to receive an action;

a lower forend monolithically formed with the lower receiver and extending distally from the lower receiver; and

an upper forend configured to slidably connect to the lower forend in a direction parallel to the lower forend, the lower forend defining a channel along a length thereof configured to receive a barrel, wherein the lower receiver is configured to support at least a majority of a weight of the barrel.

2. The firearm chassis according to claim 1, wherein the lower receiver is configured to support an entirety of the weight of the barrel.

3. The firearm chassis according to claim 1, wherein the lower forend and the upper forend are dimensioned to encapsulate the barrel and be spaced from the barrel along an entire length of the barrel.

4. The firearm chassis according to claim 2, wherein the lower receiver supports the barrel thereon at a location proximal of a barrel nut of the barrel.

5. The firearm chassis according to claim 1, wherein the lower forend has a U-shaped transverse cross-sectional configuration.

6. The firearm chassis according to claim 1, further comprising at least one weight disposed within the lower forend, wherein the weight is configured to move between at least two different locations along a length of the lower forend to adjust a center of mass of the chassis.

7. The firearm chassis according to claim 1, further comprising a fastening assembly configured to secure the lower forend and the upper forend to each other.

8. The firearm chassis according to claim 7, wherein the fastening assembly includes a pin movably connected to the lower forend, wherein the pin is configured to engage the upper forend to selectively fix the upper forend to the lower forend.

9. The firearm chassis according to claim 8, further comprising a biasing member configured to resiliently bias the pin into engagement with an opening defined in the upper forend.

10. The firearm chassis according to claim 1, wherein the lower receiver defines a recess in a bottom surface thereof configured to receive a finger of a user, the recess being disposed distally of the magazine well.

17

11. The firearm chassis according to claim 1, wherein the lower receiver includes a stock mount extending upwardly therefrom, the stock mount defining an opening that extends in a direction parallel with a longitudinal axis defined by the lower forend.

12. A firearm system comprising:
a chassis including:

an elongated lower receiver defining a trigger well and a pair of vertically-oriented holes; and

an elongated lower forend extending distally from the lower receiver, the lower forend defining a longitudinally-extending channel;

an upper receiver configured to couple to the lower receiver and defining a pair of vertically-oriented holes; and

first and second fasteners configured for receipt in the corresponding vertically-oriented holes of the lower receiver and the upper receiver to exert a vertically-oriented force on the upper receiver and selectively secure the upper receiver to the lower receiver.

13. The firearm system according to claim 12, wherein the lower forend and the lower receiver are monolithically formed.

18

14. The firearm system according to claim 12, further comprising an elongated upper forend configured to detachably connect to the lower forend, wherein the upper forend and the lower forend cooperatively define an enclosed, elongated channel dimensioned for receipt of a barrel.

15. The firearm system according to claim 14, wherein the lower forend and the upper forend are configured to be spaced from the barrel along an entire length of the barrel.

16. The firearm system according to claim 15, wherein the lower receiver supports the barrel thereon at a location proximal of a barrel nut of the barrel, such that at least a majority of a weight of the barrel is supported by the lower receiver.

17. The firearm system according to claim 12, further comprising first and second dowels, wherein the upper receiver further defines a pair of horizontally-oriented holes in vertical registration with the pair of vertically-oriented holes of the upper receiver, the pair of horizontally-oriented holes configured for receipt of the corresponding first and second dowels.

* * * * *